

# APPROVAL SHEET

## MULTILAYER CERAMIC CAPACITORS

General Purpose Series (4V to 100V)

0201 to 1812 Sizes

NP0, X7R, Y5V, X6S, X7S & X5R Dielectrics

Halogen Free & RoHS Compliance



\*Contents in this sheet are subject to change without prior notice.

Multilayer Ceramic Capacitors

## 1. DESCRIPTION

MLCC consists of a conducting material and electrodes. To manufacture a chip-type SMT and achieve miniaturization, high density and high efficiency, ceramic condensers are used.

WTC's MLCC is made by NP0, X7R, X6S, X5R and Y5V dielectric material and which provides product with high electrical precision, stability and reliability.

## 2. FEATURES

- a. A wide selection of sizes is available (0201 to 1812).
- b. High capacitance in given case size.
- c. Capacitor with lead-free termination (pure Tin).

## 3. APPLICATIONS


- a. For general digital circuit.
- b. For power supply bypass capacitors.
- c. For consumer electronics.
- d. For telecommunication.

## 4. HOW TO ORDER

<b>1206</b>	<b>B</b>	<b>104</b>	<b>K</b>	<b>500</b>	<b>C</b>	<b>I</b>
<b>Size</b> Inch (mm)	<b>Dielectric</b> N=NP0 (C0G)	<b>Capacitance</b> Two significant digits followed by no. of zeros. And R is in place of decimal point.  eg.: 0R5=0.5pF 1R0=1.0pF 104=10x10 <sup>4</sup> =100nF	<b>Tolerance</b> A=±0.05pF B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20% Z=20/+80%	<b>Rated voltage</b> Two significant digits followed by no. of zeros. And R is in place of decimal point.  4R0=4 VDC 6R3=6.3 VDC 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC	<b>Termination</b> C=Cu/Ni/Sn	<b>Packaging style</b> T=7" reeled G=13" reeled
<b>0201</b> (0603)						
<b>0402</b> (1005)						
<b>0603</b> (1608)						
<b>0805</b> (2012)						
<b>1206</b> (3216)						
<b>1210</b> (3225)						
<b>1812</b> (4532)						

Multilayer Ceramic Capacitors

## 5. EXTERNAL DIMENSIONS

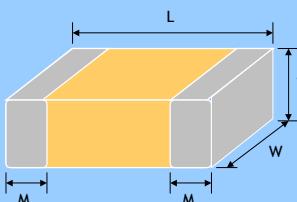Outline	Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol	Soldering Method *	M <sub>B</sub> (mm)
	01R5 (0402)	0.4±0.02	0.2±0.02	0.2±0.02	V R	0.10±0.03
	0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03	L R	0.15±0.05
		0.6±0.05 <sup>#2</sup>	0.3±0.05 <sup>#2</sup>	0.3±0.05 <sup>#2</sup>		
		0.6±0.09 <sup>#3</sup>	0.3±0.09 <sup>#3</sup>	0.3±0.09 <sup>#3</sup>		0.15+0.1/-0.05
	0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05	N R	0.25
				0.50+0.02/-0.05	Q R	
		1.00±0.20	0.50±0.20	0.5±0.20	E R	+0.05/-0.10
	0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07	S R / W	0.40±0.15
		1.60+0.15/-0.10	0.80+0.15/-0.10	0.50±0.10	H R / W	
		1.60±0.20 <sup>#1</sup>	0.80±0.20 <sup>#1</sup>	0.80+0.15/-0.10	X R / W	
				0.8±0.20 <sup>#1</sup>		
	0805 (2012)	2.00±0.15	1.25±0.10	0.50±0.10	H R / W	0.50±0.20
				0.60±0.10	A R / W	
				0.80±0.10	B R / W	
				1.25±0.10	D R	
				0.85±0.10	T R / W	
		2.00±0.20	1.25±0.20	1.25±0.20	I R	
	1206 (3216)	3.20±0.15	1.60±0.15	0.80±0.10	B R / W	0.60±0.20 (0.5±0.25)***
				0.95±0.10	C R	
				1.25±0.10	D R	
				1.15±0.15	J R	
		3.20±0.20	1.60±0.20	1.60±0.20	G R	
				0.85±0.10	T R / W	
				1.60+0.30/-0.10	P R	
				3.20+0.30/-0.1 <sup>#5</sup>		
	1210 (3225)	3.20±0.30	2.50±0.20	0.95±0.10	C R	0.75±0.25
				0.85±0.10	T R	
				1.25±0.10	D R	
				1.60±0.20	G R	
		3.20±0.40	2.50±0.30	2.00±0.20	K R	
				2.50±0.30	M R	
				2.50±0.50 <sup>#4</sup>	2.50±0.50 <sup>#4</sup>	
				3.20±0.60 <sup>#4</sup>		
	1808 (4520)	4.50±0.40 (4.5+0.5/-0.3)**	2.03±0.25	1.25±0.10	D R	0.75±0.25 (0.5±0.25)***
				1.40±0.15	F R	
				1.60±0.20	G R	
				2.00±0.20	K R	
		4.50±0.40 (4.5+0.5/-0.3)**	3.20±0.30	1.25±0.10	D R	
				1.60±0.20	G R	
	1812 (4532)	4.50±0.40 (4.5+0.5/-0.3)**	3.20±0.30	2.00±0.20	K R	0.75±0.25 (0.5±0.25)***
				2.50±0.30	M R	
				2.80±0.30	U R	

\* R = Reflow soldering process ; W = Wave soldering process.

\*\* For 1808/1812/1825\_200V~4000V and safety certificated products.

\*\*\* For 1206<sub>≥</sub>1000V, 1808/1812\_200V~4000V and safety certificated products.

#1: For 0603/Cap $\geq$ 10μF or 0603( $\leq$ 6.3V)/Cap $\geq$ 4.7μF For 0603(>10V)/Cap>1μF products.

#2: For 0201/0.1uF < Cap < 0.68uF products, Excluding 0201X334~474( $\leq$ 6.3V) & 0201X224( $\leq$ 10V).

#3: For 0201/Cap $\geq$ 0.68μF products.

#4: For 1210(100V)/Cap>1μF or 1210(250V)/Cap>0.47μF or 1210(400V~630V)/Cap>0.22μF.

#5: For 1206(100V)/Cap $\geq$ 1.2μF products.

Multilayer Ceramic Capacitors

## 6. GENERAL ELECTRICAL DATA

Dielectric	NP0	X7R	Y5V	X5R	X6S	X7S
Size	0201, 0402, 0603, 0805, 1206, 1210, 1812					
Capacitance range*	0.1pF to 0.1μF	100pF to 47μF	0.01μF to 100μF	100pF to 220μF	0.1μF to 100μF	0.1μF to 100μF
Capacitance tolerance**	Cap≤5pF <sup>#1</sup> : A ( $\pm 0.05\mu F$ ), B ( $\pm 0.1\mu F$ ), C ( $\pm 0.25\mu F$ ) 5pF<Cap<10pF: C ( $\pm 0.25\mu F$ ), D ( $\pm 0.5\mu F$ ) Cap≥10pF: F ( $\pm 1\%$ ), G ( $\pm 2\%$ ), J ( $\pm 5\%$ ), K ( $\pm 10\%$ )	J ( $\pm 5\%$ ), K ( $\pm 10\%$ ), M ( $\pm 20\%$ )	M ( $\pm 20\%$ ), Z (-20/+80%)	K ( $\pm 10\%$ ), M ( $\pm 20\%$ )	K ( $\pm 10\%$ ), M ( $\pm 20\%$ )	K ( $\pm 10\%$ ), M ( $\pm 20\%$ )
Rated voltage (WVDC)	10V, 16V, 25V, 50V, 100V	6.3V, 10V, 16V, 25V, 50V, 100V				
Operating temperature	-55 to +125°C		-25 to +85°C	-55 to +85°C	-55 to +105°C	-55 to +125°C
Capacitance characteristic	±30ppm	±15%	+30/-80%	±15%	±22%	±22%
Termination	Ni/Sn (lead-free termination)					

#1: NP0, 0.1pF product only provide B tolerance; 0603N0R3/0R4 provide B&C tolerance.

\* Measured at the condition of 30~70% related humidity.

NP0: Apply  $1.0 \pm 0.2\text{VRms}$ ,  $1.0\text{MHz} \pm 10\%$  for  $\text{Cap} \leq 1000\text{pF}$  and  $1.0 \pm 0.2\text{VRms}$ ,  $1.0\text{kHz} \pm 10\%$  for  $\text{Cap} > 1000\text{pF}$ ,  $25^\circ\text{C}$  at ambient temperature

X7R/X6S/X5R/X7S: Please refer to page 13 "Reliability test conditions and requirements" for detail.

Y5V: Apply  $1.0 \pm 0.2\text{VRms}$ ,  $1.0\text{kHz} \pm 10\%$ , at  $20^\circ\text{C}$  ambient temperature.

\*\* Preconditioning for Class II MLCC: Perform a heat treatment at  $150 \pm 10^\circ\text{C}$  for 1 hour and then leave in ambient condition for  $24 \pm 2$  hours before measurement.



Multilayer Ceramic Capacitors

## 7. CAPACITANCE RANGE

### 7-1. NPO Dielectric 0201, 0402, 0603, 0805 Sizes

Capacitance	DIELECTRIC	NPO																			
	SIZE	0201					0402					0603					0805				
	RATED VOLTAGE (VDC)	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100
0.1pF (0R1)	L	L	L	L	L	N	N	N	N												
0.2pF (0R2)	L	L	L	L	L	N	N	N	N												
0.3pF (0R3)	L	L	L	L	L	N	N	N	N		S	S	S	S	S						
0.4pF (0R4)	L	L	L	L	L	N	N	N	N		S	S	S	S	S						
0.5pF (0R5)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
0.6pF (0R6)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
0.7pF (0R7)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
0.8pF (0R8)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
0.9pF (0R9)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
1.0pF (1R0)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
1.2pF (1R2)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
1.5pF (1R5)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
1.8pF (1R8)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
2.0pF (2R0)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
2.2pF (2R2)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
2.7pF (2R7)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
3.0pF (3R0)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
3.3pF (3R3)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
3.9pF (3R9)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
4.0pF (4R0)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
4.7pF (4R7)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
5.0pF (5R0)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
5.6pF (5R6)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
6.0pF (6R0)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
6.8pF (6R8)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
7.0pF (7R0)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
8.0pF (8R0)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
8.2pF (8R2)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
9.0pF (9R0)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
10pF (100)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
12pF (120)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
15pF (150)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
18pF (180)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
22pF (220)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
27pF (270)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
33pF (330)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
39pF (390)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
47pF (470)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
56pF (560)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
68pF (680)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
82pF (820)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
100pF (101)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
120pF (121)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
150pF (151)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
180pF (181)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
220pF (221)	L	L	L	L	L	N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
270pF (271)	L					N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
330pF (331)	L					N	N	N	N		S	S	S	S	S	S	A	A	A	A	A
390pF (391)	L					N	N	N	N		S	S	S	S	S	S	B	B	B	B	B
470pF (471)	L					N	N	N	N		S	S	S	S	S	S	B	B	B	B	B
560pF (561)	L					N	N	N	N		S	S	S	S	S	S	B	B	B	B	B
680pF (681)						N	N	N	N		S	S	S	S	S	S	B	B	B	B	B
820pF (821)						N	N	N	N		S	S	S	S	S	S	B	B	B	B	B
1,000pF (102)						N	N	N	N		S	S	S	S	S	S	B	B	B	B	B
1,200pF (122)											X	X	X	X	X		B	B	B	B	B
1,500pF (152)											X	X	X	X	X		B	B	B	B	B
1,800pF (182)											X	X	X	X	X		B	B	B	B	B
2,200pF (222)											X	X	X	X	X		B	B	B	B	B
2,700pF (272)											X	X	X	X	X		D	D	D	D	D
3,300pF (332)											X	X	X	X	X		D	D	D	D	D
3,900pF (392)											X	X	X	X	X		D	D	D	D	D
4,700pF (472)											X	X	X	X	X		D	D	D	D	D
5,600pF (562)											X	X	X	X	X		D	D	D	D	D
6,800pF (682)											X	X	X	X	X		D	D	D	D	D
8,200pF (822)											X	X	X	X	X		D	D	D	D	D
0.010uF (103)											X	X	X	X	X		D	D	D	D	D
0.012uF (123)																	D	D	D	D	D
0.015uF (153)																	D	D	D	D	D
0.018uF (183)																	D	D	D	D	D
0.022uF (223)																	D	D	D	D	D

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “\*” mark is expressed capacitance tolerance “J” ( $\pm 5\%$ ) only.

3. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

7-1. NP0 Dielectric 1206, 1210, 1812 Sizes

DIELECTRIC		NP0													
SIZE		1206					1210					1812			
RATED VOLTAGE (VDC)		10	16	25	50	100	10	16	25	50	100	16	25	50	100
Capacitance	1.0pF (1R0)														
	1.2pF (1R2)	B	B	B	B	B									
	1.5pF (1R5)	B	B	B	B	B									
	1.8pF (1R8)	B	B	B	B	B									
	2.2pF (2R2)	B	B	B	B	B									
	2.7pF (2R7)	B	B	B	B	B									
	3.3pF (3R3)	B	B	B	B	B									
	3.9pF (3R9)	B	B	B	B	B									
	4.7pF (4R7)	B	B	B	B	B									
	5.6pF (5R6)	B	B	B	B	B									
	6.8pF (6R8)	B	B	B	B	B									
	8.2pF (8R2)	B	B	B	B	B									
	10pF (100)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	12pF (120)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	15pF (150)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	18pF (180)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	22pF (220)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	27pF (270)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	33pF (330)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	39pF (390)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	47pF (470)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	56pF (560)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	68pF (680)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	82pF (820)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	100pF (101)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	120pF (121)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	150pF (151)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	180pF (181)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	220pF (221)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	270pF (271)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	330pF (331)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	390pF (391)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	470pF (471)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	560pF (561)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	680pF (681)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	820pF (821)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	1.000pF (102)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	1,200pF (122)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	1,500pF (152)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	1,800pF (182)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	2,200pF (222)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	2,700pF (272)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	3,300pF (332)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	3,900pF (392)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	4,700pF (472)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	5,600pF (562)	B	B	B	B	B	C	C	C	C	C	D	D	D	
	6,800pF (682)	C	C	C	C	C	C	C	C	C	C	D	D	D	
	8,200pF (822)	D	D	D	D	D	C	C	C	C	C	D	D	D	
	0.010μF (103)	D	D	D	D	D	C	C	C	C	C	D	D	D	
	0.012μF (123)	P	P	P	P	P	D	D	D	D	D	D	D	D	
	0.015μF (153)	P	P	P	P	P	D	D	D	D	D	D	D	D	
	0.018μF (183)	P	P	P	P	P	K	K	K	K	K	D	D	D	
	0.022μF (223)	P	P	P	P	P	K	K	K	K	K	D	D	D	
	0.027μF (273)	P	P	P	P		K	K	K	K	K	D	D	D	
	0.033μF (333)	P	P	P	P	T	K	K	K	K	K	D	D	D	
	0.039μF (393)	P	P	P	P		K	K	K	K	K	M	M	M	
	0.047μF (473)	P	P	P	P		K	K	K	K	K	M	M	M	
	0.056μF (563)	P	P	P	P							M	M	M	
	0.068μF (683)	P	P	P	P							M	M	M	
	0.082μF (823)	P	P	P	P							M	M	M	
	0.1μF (104)	P	P	P	P							M	M	M	

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “\*” mark is expressed capacitance tolerance “J” ( $\pm 5\%$ ) only.

3. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

**7-2. X7R Dielectric 0201, 0402, 0603, 0805 Sizes**

DIELECTRIC		X7R																						
SIZE		0201					0402					0603					0805							
RATED VOLTAGE (VDC)		6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	6.3	10	16	25	50	100
100pF (101)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
120pF (121)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
150pF (151)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
180pF (181)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
220pF (221)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
270pF (271)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
330pF (331)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
390pF (391)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
470pF (471)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
560pF (561)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
680pF (681)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
820pF (821)		L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
1,000pF (102)	L	L	L	L	L	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
1,200pF (122)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
1,500pF (152)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
1,800pF (182)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
2,200pF (222)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
2,700pF (272)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
3,300pF (332)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
3,900pF (392)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
4,700pF (472)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
5,600pF (562)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
6,800pF (682)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
8,200pF (822)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
0.010μF (103)	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B			
0.012μF (123)					N	N	N	N	N	S	S	S	S	S	X	B	B	B	B	B	B			
0.015μF (153)					N	N	N	N	N	S	S	S	S	S	X	B	B	B	B	B	B			
0.018μF (183)					N	N	N	N	N	S	S	S	S	S	X	B	B	B	B	B	B			
0.022μF (223)	L	L	N	N	N	N	N	N	N	S	S	S	S	S	X	B	B	B	B	B	B			
0.027μF (273)			N	N	N	N	N	N	N	S	S	S	S	S	X	B	B	B	B	D				
0.033μF (333)			N	N	N	N	N	N	N	S	S	S	S	S	X	X	B	B	B	B	D			
0.039μF (393)			N	N	N	N	N	N	N	S	S	S	S	S	X	X	B	B	B	B	D			
0.047μF (473)			N	N	N	N	N	N	N	S	S	S	S	S	X	X	B	B	B	B	D			
0.056μF (563)			N	N	N	E	N	N	N	S	S	S	S	S	X	X	B	B	B	B	D			
0.068μF (683)			N	N	N	E	N	N	N	S	S	S	S	S	X	X	B	B	B	B	D			
0.082μF (823)			N	N	N	E	N	N	N	S	S	S	S	S	X	X	B	B	B	B	D			
0.10μF (104)			N	N	N	E	N	N	N	S	S	S	S	S	X	X	B	B	B	B	D			
0.12μF (124)										S	S	X					B	B	B	B	I			
0.15μF (154)										S	S	X	X				D	D	D	D	I			
0.18μF (184)										S	S	X					D	D	D	D	I			
0.22μF (224)										N	N	N	N	S	S	X	X	D	D	D	D	I		
0.27μF (274)											X	X	X	X				D	D	D	I	I		
0.33μF (334)											X	X	X	X	X			D	D	D	I	I		
0.39μF (394)											X	X	X	X	X			D	D	D	I	I		
0.47μF (474)										N	N	X	X	X	X	X		D	D	D	I	I		
0.56μF (564)											X	X	X					D	D	D	D			
0.68μF (684)											X	X	X					D	D	D	I			
0.82μF (824)											X	X	X					D	D	D	D			
1.0μF (105)										N		X	X	X	X	X		D	D	D	I			
1.5μF (155)																		I	I	I				
2.2μF (225)																		I	I	I	I	I		
3.3μF (335)																		I	I	I	I	I		
4.7μF (475)																								
6.8μF (685)																								
10μF (106)																								
22μF (226)																								

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “\*” mark is expressed product not in 10% (code “K”) tolerance.

Multilayer Ceramic Capacitors

7-2. X7R Dielectric 1206, 1210, 1812 Sizes

Capacitance	DIELECTRIC	X7R																		
	SIZE	1206					1210					1812								
	RATED VOLTAGE (VDC)	6.3	10	16	25	35	50	100	6.3	10	16	25	35	50	100	10	16	25	50	100
	100pF (101)																			
	120pF (121)																			
	150pF (151)	B	B	B		B	B													
	180pF (181)	B	B	B		B	B													
	220pF (221)	B	B	B		B	B													
	270pF (271)	B	B	B		B	B													
	330pF (331)	B	B	B		B	B													
	390pF (391)	B	B	B		B	B													
	470pF (471)	B	B	B		B	B													
	560pF (561)	B	B	B		B	B													
	680pF (681)	B	B	B		B	B													
	820pF (821)	B	B	B		B	B													
	1,000pF (102)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	1,200pF (122)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	1,500pF (152)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	1,800pF (182)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	2,200pF (222)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	2,700pF (272)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	3,300pF (332)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	3,900pF (392)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	4,700pF (472)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	5,600pF (562)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	6,800pF (682)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	8,200pF (822)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.010μF (103)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.012μF (123)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.015μF (153)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.018μF (183)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.022μF (223)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.027μF (273)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.033μF (333)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.039μF (393)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.047μF (473)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.056μF (563)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.068μF (683)	B	B	B		B	B		C	C	C		C	C	D	D	D	D	D	
	0.082μF (823)	B	B	B		B	D		C	C	C		C	C	D	D	D	D	D	
	0.10μF (104)	B	B	B		B	C		C	C	C		C	C	D	D	D	D	D	
	0.12μF (124)	B	B	B		B	D		C	C	C		C	C	D	D	D	D	D	
	0.15μF (154)	C	C	C		C	G		C	C	C		C	D	D	D	D	D	D	
	0.18μF (184)	C	C	C		C	G		C	C	C		C	D	D	D	D	D	D	
	0.22μF (224)	C	C	C		C	G		C	C	C		C	D	D	D	D	D	D	
	0.27μF (274)	C	C	C		D	G		C	C	C		C	G	D	D	D	D	D	
	0.33μF (334)	C	C	C		D	G		C	C	C		D	G	D	D	D	D	D	
	0.39μF (394)	C	C	J		P	G		C	C	C		D	M	D	D	D	D	D	
	0.47μF (474)	J	J	J		P	G		C	C	C		D	M	D	D	D	D	K	
	0.56μF (564)	J	J	J		P	P		D	D	D		D	M	D	D	D	D	K	
	0.68μF (684)	J	J	J		P	P		D	D	D		D	K	D	D	D	K	K	
	0.82μF (824)	J	J	J		P	P		D	D	D		D	K	D	D	D	K	K	
	1.0μF (105)	J	J	J		P	P		D	D	D		D	K	D	D	D	K	K	
	1.5μF (155)	J	J	J	P	P			G	G		M	M						K	
	2.2μF (225)	J	J	J	P	P	P		G	G		M	M				M	M		
	3.3μF (335)	P	P	P	P	P			G	G		M								
	4.7μF (475)	P	P	P	P	P			K	K	K	M	M							
	6.8μF (685)																			
	10μF (106)	P	P	P	P	P			K	K	K	M	M							
	22μF (226)	P	P	P*					M	M	M									
	47μF (476)								M	M										
	100μF (107)																			

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “\*” mark is expressed product not in 10% (code “K”) tolerance.

Multilayer Ceramic Capacitors

**7-3. Y5V Dielectric 0402, 0603, 0805 Sizes**

DIELECTRIC		Y5V															
SIZE		0402					0603					0805					
RATED VOLTAGE (VDC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	100
Capacitance	0.010μF (103)	N	N	N	N		S	S	S	S		A	A	A	A	B	
	0.015μF (153)	N	N	N	N		S	S	S	S		A	A	A	A	B	
	0.022μF (223)	N	N	N	N		S	S	S	S		A	A	A	A	B	
	0.033μF (333)	N	N	N	N		S	S	S	S		A	A	A	A	B	
	0.047μF (473)	N	N	N			S	S	S	S		A	A	A	A	B	
	0.068μF (683)	N	N	N			S	S	S	S		A	A	A	A	B	
	0.10μF (104)	N	N	N			S	S	S	S		A	A	A	A	B	
	0.15μF (154)	N					S	S	S	S		A	A	A	A	A	
	0.22μF (224)	N	N				S	S	S	S		A	A	A	A	A	
	0.33μF (334)	N	N				S	S	S			B	B	B	B		
	0.47μF (474)	N	N				S	S				B	B	B	B		
	0.68μF (684)						S	X				B	B	D	D		
	1.0μF (105)						S	X				B	B	D	D		
	1.5μF (155)						S					D	D				
	2.2μF (225)						S	S				D	D				
	3.3μF (335)											D	D				
	4.7μF (475)											D	D				
	6.8μF (685)											I					
	10μF (106)										I	I					
	22μF (226)																

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

**7-3. Y5V Dielectric 1206, 1210, 1812 Sizes**

DIELECTRIC		Y5V																	
SIZE		1206						1210						1812					
RATED VOLTAGE (VDC)		6.3	10	16	25	50	100	6.3	10	16	25	35	50	100	10	16	25	50	100
Capacitance	0.010μF (103)	B	B	B	B	B						C						D	
	0.015μF (153)	B	B	B	B	B						C						D	
	0.022μF (223)	B	B	B	B	B						C						D	
	0.033μF (333)	B	B	B	B	B						C						D	
	0.047μF (473)	B	B	B	B	B						C						D	
	0.068μF (683)	B	B	B	B	B						C						D	
	0.10μF (104)	B	B	B	B	B		C	C	C	C	C	C	D	D	D	D	D	
	0.15μF (154)	B	B	B	B	C	C	C	C	C	C	C	C	D	D	D	D	D	
	0.22μF (224)	B	B	B	B	C	C	C	C	C	C	C	C	D	D	D	D	D	
	0.33μF (334)	B	B	B	B		C	C	C	C	C	C	C	D	D	D	D	D	
	0.47μF (474)	B	B	B	B		C	C	C	C	C	C	C	D	D	D	D	D	
	0.68μF (684)	B	B	B	B		C	C	C	C	C	C	C	D	D	D	D	D	
	1.0μF (105)	C	C	C	C		C	C	C	C	C	C	C	D	D	D	D	D	
	1.5μF (155)	C	C	C			C	C	C					D	D	D	D	D	
	2.2μF (225)	C	C	C			C	C	C			G		D	D	D	D	D	
	3.3μF (335)	J	J	J			C	C	C					D	D	D	D	D	
	4.7μF (475)	J	J	J			C	C	D			G		D	D	D	D	D	
	6.8μF (685)	J	J				C	C	D			D		D	D	D	D	D	
	10μF (106)	J	J				D	D	G	K				D	D	D			
	22μF (226)	P					K	K						M					
	47μF (476)						K	K						M					
	100μF (107)						M												

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

7-4. X5R Dielectric 0201, 0402, 0603, 0805, 1206, 1210 Sizes

Dielectric		X5R															
Size		0201					0402					0603					
Rated Voltage (VDC)	6.3	10	16	25	50	4	6.3	10	16	25	50	4	6.3	10	16	25	50
Capacitance	100pF (101)		L	L	L												
	150pF (151)		L	L	L												
	220pF (221)		L	L	L												
	330pF (331)		L	L	L												
	470pF (471)		L	L	L												
	680pF (681)		L	L	L												
	820pF (821)		L	L	L												
	1,000pF (102)	L	L	L	L												
	1,500pF (152)	L	L	L													
	2,200pF (222)	L	L	L													
	2,700pF (272)	L	L	L													
	3,300pF (332)	L	L	L													
	4,700pF (472)	L	L	L													
	6,800pF (682)	L	L	L													
	0.010μF (103)	L	L	L	L	L											
	0.015μF (153)	L	L									N					
	0.022μF (223)	L	L	L	L							N					
	0.033μF (333)	L	L									N	N				
	0.047μF (473)	L	L	L	L		N	N	N	N	N						
	0.068μF (683)	L	L				N	N	N	N	E						
	0.082μF (823)	L	L				N	N	N	N	E						
	0.10μF (104)	L	L	L	L		N	N	N	N	N	E					
	0.15μF (154)						N	N	N	N	N						
	0.22μF (224)	L	L	L*			N	N	N	N	N	X	X	X	X	X	
	0.33μF (334)	L					N	N	N	N		X	X	X	X	X	
	0.47μF (474)	L					N	N	N	N	E	X	X	X	X	X	X
	0.68μF (684)						N	N				X	X	X	X	X	
	0.82μF (824)											X	X	X	X	X	
	1.0μF (105)	L	L*	L*			N	N	N	N	E	X	X	X	X	X	X
	1.5μF (155)											X	X				
	2.2μF (225)	L*	L*				N	E	E			X	X	X	X	X	X
	3.3μF (335)											X	X				
	4.7μF (475)						E	E	E*			X	X	X	X	X	
	6.8μF (685)																
	10μF (106)						E*	E*	E*			X	X	X	X	X*	
	22μF (226)							E*				X*	X*	X*			
	47μF (476)											X*	X*				

Dielectric		X5R																		
Size		0805					1206					1210								
Rated Voltage (VDC)	4	6.3	10	16	25	50	4	6.3	10	16	25	50	4	6.3	10	16	25	35	50	
Capacitance	1.0μF (105)		D	D	D	I						P								
	1.5μF (155)	I	I	I	I	I		J	J				K	K						
	2.2μF (225)	I	I	I	I	I		J	J	P	P		K	K						
	3.3μF (335)	I	I	I	I	I		P	P	P	P		K	K						
	4.7μF (475)	I	I	I	I	I	P	P	P	P	P		K	K	K					
	6.8μF (685)						P	P												
	10μF (106)	I	I	I	I	I	P	P	P	P	P		K	K	K	K	M	M		
	22μF (226)	I	I*	I*	I*		P	P	P	P		M	M	M	M	M	M			
	47μF (476)	I*	I*				P	P	P*			M	M	M	M	M*				
	100μF (107)	I*	I*				P*					M*	M*	M*						
	220μF (227)											M*	M*							

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “\*” mark is expressed product not in 10% (code “K”) tolerance.

Multilayer Ceramic Capacitors

**7-5. X6S Dielectric 0201, 0402, 0603, 0805, 1206, 1210 Sizes**

Dielectric		X6S																													
Size		0201					0402					0603					0805					1206					1210				
Rated Voltage (VDC)		4	6.3	10	16	25	6.3	10	16	25	4	6.3	10	16	25	4	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	0.10μF (104)	L	L	L	L	L	N																								
	0.15μF (154)																														
	0.22μF (224)	L	L*				N																								
	0.33μF (334)																														
	0.47μF (474)	L					N																								
	0.68μF (684)																														
	1.0μF (105)	L*	L*				N	N	N	E																					
	1.5μF (155)																														
	2.2μF (225)						E	E	E		X	X	X	X					I												
	3.3μF (335)																														
	4.7μF (475)						E	E			X	X	X	X	X				I	I	I	I	I								
	6.8μF (685)																														
	10μF (106)						E*				X*	X*	X*	X*		I	I	I	I	I			P								
	22μF (226)										X*	X*				I*	I*	I*	I*	I*		P	P*	P					M		
	47μF (476)															I*	I*					P								M	M
	100μF (107)																													M*	M*

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “\*” mark is expressed product not in 10% (code “K”) tolerance.

**7-6. X7S Dielectric 0402, 0603, 0805, 1206, 1210 Sizes**

Dielectric		X7S																												
Size		0201				0402				0603				0805				1206				1210								
Rated Voltage (VDC)		10V	6.3	10	16	6.3	10	16	25	10	16	25	50	100	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	
Capacitance	0.1μF (104)	L													I															
	1.0μF (105)		E																											
	1.5μF (155)																													
	2.2μF (225)	E	E							X																				
	3.3μF (335)									X	X				I															
	4.7μF (475)									X	X																			
	6.8μF (685)																													
	10μF (106)														I	I														
	22μF (226)																					P*								
	47μF (476)																					P*								
	100μF (107)																												M*	

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “\*” mark is expressed product not in 10% (code “K”) tolerance.

Multilayer Ceramic Capacitors

## 8. PACKAGING STYLE AND QUANTITY

Size	Thickness (mm)/Symbol	Paper tape		Plastic tape	
		7" reel	13" reel	7" reel	13" reel
0201 (0603)	0.30±0.03 L	15,000	70,000	-	-
	0.30±0.05 L	15,000	-	-	-
	0.30±0.09 L	15,000	-	-	-
0402 (1005)	0.50±0.05 N	10,000	50,000	-	-
	0.50+0.02/-0.05 Q	10,000	50,000	-	-
	0.50±0.20 E	10,000	-	-	-
0603 (1608)	0.50±0.10 H	4,000	-	-	-
	0.80±0.07 S	4,000	15,000	-	-
	0.80+0.15/-0.10 X	4,000	15,000	-	-
0805 (2012)	0.50±0.10 H	4,000	15,000	-	-
	0.60±0.10 A	4,000	15,000	-	-
	0.80±0.10 B	4,000	15,000	-	-
	0.85±0.10 T	4,000	15,000	-	-
	1.25±0.10 D	-	-	3,000	10,000
	1.25±0.20 I	-	-	3,000	10,000
1206 (3216)	0.80±0.10 B	4,000	15,000	-	-
	0.85±0.10 T	4,000	15,000	-	-
	0.95±0.10 C	-	-	3,000	10,000
	1.15±0.15 J	-	-	3,000	10,000
	1.25±0.10 D	-	-	3,000	10,000
	1.60±0.20 G	-	-	2,000	10,000
1210 (3225)	1.60+0.30/-0.10 P	-	-	2,000	9,000
	0.85±0.10 T	-	-	3,000	10,000
	0.95±0.10 C	-	-	3,000	10,000
	1.25±0.10 D	-	-	3,000	10,000
	1.60±0.20 G	-	-	2,000	-
	2.00±0.20 K	-	-	1,000	6,000
1808 (4520)	2.50±0.30 M	-	-	1,000	6,000
	1.25±0.10 D	-	-	2,000	10,000
	1.40±0.15 F	-	-	2,000	10,000
	1.60±0.20 G	-	-	2,000	8,000
1812 (4532)	2.00±0.20 K	-	-	1,000	6,000
	1.25±0.10 D	-	-	1,000	5,000
	1.60±0.20 G	-	-	1,000	-
	2.00±0.20 K	-	-	1,000	-
	2.50±0.30 M	-	-	500	3,000
	2.80±0.30 U	-	-	500	-

Unit: pieces

Multilayer Ceramic Capacitors

## 9. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements																																																																																																																																																																																																																																								
1.	Visual and Mechanical	---	* No remarkable defect. * Dimensions to conform to individual specification sheet.																																																																																																																																																																																																																																								
2.	Capacitance	*Test temp.: Room Temperature. *Class I: (NP0)	* Shall not exceed the limits given in the detailed spec.																																																																																																																																																																																																																																								
3.	Q/D.F. (Dissipation Factor)	<p>≤1000pF, 1.0±0.2Vrms, 1MHz±10%          &gt;1000pF, 1.0±0.2Vrms, 1KHz±10%</p> <p>Class II: (X7R, X7E, X6S, X5R, X7S, Y5V)  <math>C \leq 10\mu F</math>, 1.0±0.2Vrms, 1KHz±10% **  <math>C &gt; 10\mu F</math>, 0.5±0.2Vrms, 120Hz±20%</p> <p>** Test condition: 0.5±0.2Vrms, 1KHz±10%</p> <p>X7R:          0603/475(6.3V)          X5R:          0201≥224 (6.3V, 10V, 16V)<sup>#1</sup>,          0402≥475 (6.3V, 16V), 0402≥225(10V),          0603=106 (6.3V)          TT18X≥475(10V), TT15X series          X6S:          0201/474(4V), 0201&gt;104 (6.3V, 10V),          0402≥225 (6.3V),          0402/475 (10V), 0603/106 (6.3V),          X7S:          0402/225(6.3V)</p> <p>#1 Excluding          X5R/0201/105(6.3V); 225(10V),          0402X475M6R3          (1.0±0.2Vrms, 1KHz±10%)</p>	NP0: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R: <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th colspan="2">Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td>≥100V</td> <td>≤ 2.5%</td> <td>≤ 3%</td> <td>1206≥0.47μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 5%</td> <td>0603≥0.068μF; 0805&gt;0.1μF; 1206≥1μF; 1210≥2.2μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 10%</td> <td>0805&gt;0.22μF; 1210≥3.3μF</td> </tr> <tr> <td>50V</td> <td>≤ 2.5%</td> <td>≤ 3%</td> <td>0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 5%</td> <td>0201≥0.01μF; 1210≥3.3μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 10%</td> <td>0402≥0.012μF; 0603&gt;0.1μF; 0805/X7R&gt;0.47μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 12.5%</td> <td>1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤ 3.5%</td> <td>≤ 10%</td> <td>0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 5%</td> <td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 7%</td> <td>0603≥0.33μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 10%</td> <td>0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 12.5%</td> <td>0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>25V</td> <td>≤ 3.5%</td> <td>≤ 5%</td> <td>0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 10%</td> <td>0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>16V</td> <td>≤ 3.5%</td> <td>≤ 5%</td> <td>0201/X7R≥0.022μF; 0402≥0.22μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 10%</td> <td>0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>10V</td> <td>≤ 5%</td> <td>≤ 10%</td> <td>0201≥0.012μF; 0402≥0.22μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 15%</td> <td>0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td> </tr> <tr> <td>6.3V</td> <td>≤ 10%</td> <td>≤ 15%</td> <td>0201≥0.1μF; 0402≥1μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 20%</td> <td>0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td> </tr> <tr> <td>4V</td> <td>≤ 15%</td> <td>---</td> <td>0402≥2.2μF</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th colspan="2">Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td>≥100V</td> <td>≤ 2.5%</td> <td>≤ 3%</td> <td>1206≥0.47μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 5%</td> <td>0603≥0.068μF; 0805&gt;0.1μF; 1206≥1μF; 1210≥2.2μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 10%</td> <td>0805&gt;0.22μF; 1210≥3.3μF</td> </tr> <tr> <td>50V</td> <td>≤ 2.5%</td> <td>≤ 3%</td> <td>0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 5%</td> <td>0201≥0.01μF; 1210≥3.3μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 10%</td> <td>0402≥0.012μF; 0603&gt;0.1μF; 0805≥1μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 12.5%</td> <td>1206≥10μF</td> </tr> <tr> <td>35V</td> <td>≤ 3.5%</td> <td>≤ 10%</td> <td>0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 5%</td> <td>0201≥0.01μF; 0805≥1μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 7%</td> <td>0603≥0.33μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 10%</td> <td>0201≥0.01μF; 0402≥0.10μF; 0603≥0.47μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 12.5%</td> <td>0805≥2.2μF; 1206≥4.7μF; 1210≥10μF</td> </tr> <tr> <td>25V</td> <td>≤ 3.5%</td> <td>≤ 5%</td> <td>0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 10%</td> <td>0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>16V</td> <td>≤ 3.5%</td> <td>≤ 5%</td> <td>0201≥0.01μF; 0402≥0.22μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 10%</td> <td>0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 12.5%</td> <td>0402≥1μF; 0805≥10μF</td> </tr> <tr> <td>10V</td> <td>≤ 5%</td> <td>≤ 10%</td> <td>0201≥0.012μF; 0402≥0.22μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 12.5%</td> <td>0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF; 01R5/X5R</td> </tr> <tr> <td>6.3V</td> <td>≤ 10%</td> <td>≤ 15%</td> <td>0201≥0.1μF; 0402≥1μF; 0603≥10μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 20%</td> <td>0805≥4.7μF; 1206≥47μF; 1210≥100μF</td> </tr> <tr> <td>4V</td> <td>≤ 15%</td> <td>---</td> <td>0402≥2.2μF</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th colspan="2">Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤ 5%</td> <td>≤ 7%</td> <td>0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF</td> </tr> <tr> <td></td> <td></td> <td>≤ 12.5%</td> <td>1210≥6.8μF</td> </tr> <tr> <td>35V</td> <td>≤ 7%</td> <td>---</td> <td>---</td> </tr> <tr> <td>25V</td> <td>≤ 5%</td> <td>≤ 7%</td> <td>0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF;</td> </tr> <tr> <td></td> <td></td> <td>≤ 9%</td> <td>1206≥1μF; 1210≥4.7μF</td> </tr> <tr> <td>16V</td> <td>≤ 7%</td> <td>≤ 9%</td> <td>0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF;</td> </tr> <tr> <td>(C&lt;1.0μF)</td> <td></td> <td>≤ 12.5%</td> <td>1210≥22μF</td> </tr> <tr> <td>16V</td> <td>≤ 9%</td> <td>≤ 12.5%</td> <td>0603≥2.2μF; 0805≥3.3μF; 1206≥10μF;</td> </tr> <tr> <td>(C≥1.0μF)</td> <td></td> <td>≤ 12.5%</td> <td>1210≥22μF; 1812≥47μF</td> </tr> <tr> <td>10V</td> <td>≤ 12.5%</td> <td>≤ 20%</td> <td>0402≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤ 20%</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥100V	≤ 2.5%	≤ 3%	1206≥0.47μF			≤ 5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF;			≤ 10%	0805>0.22μF; 1210≥3.3μF	50V	≤ 2.5%	≤ 3%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF			≤ 5%	0201≥0.01μF; 1210≥3.3μF			≤ 10%	0402≥0.012μF; 0603>0.1μF; 0805/X7R>0.47μF;			≤ 12.5%	1206≥2.2μF; 1210≥10μF	35V	≤ 3.5%	≤ 10%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF			≤ 5%	0201≥0.01μF; 0805≥1μF; 1210≥10μF			≤ 7%	0603≥0.33μF			≤ 10%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF;			≤ 12.5%	0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	25V	≤ 3.5%	≤ 5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF;			≤ 10%	0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	16V	≤ 3.5%	≤ 5%	0201/X7R≥0.022μF; 0402≥0.22μF;			≤ 10%	0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤ 5%	≤ 10%	0201≥0.012μF; 0402≥0.22μF;			≤ 15%	0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	6.3V	≤ 10%	≤ 15%	0201≥0.1μF; 0402≥1μF;			≤ 20%	0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	4V	≤ 15%	---	0402≥2.2μF	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥100V	≤ 2.5%	≤ 3%	1206≥0.47μF			≤ 5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF			≤ 10%	0805>0.22μF; 1210≥3.3μF	50V	≤ 2.5%	≤ 3%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF			≤ 5%	0201≥0.01μF; 1210≥3.3μF			≤ 10%	0402≥0.012μF; 0603>0.1μF; 0805≥1μF; 1206≥2.2μF; 1210≥10μF			≤ 12.5%	1206≥10μF	35V	≤ 3.5%	≤ 10%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF			≤ 5%	0201≥0.01μF; 0805≥1μF			≤ 7%	0603≥0.33μF			≤ 10%	0201≥0.01μF; 0402≥0.10μF; 0603≥0.47μF;			≤ 12.5%	0805≥2.2μF; 1206≥4.7μF; 1210≥10μF	25V	≤ 3.5%	≤ 5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF;			≤ 10%	0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	16V	≤ 3.5%	≤ 5%	0201≥0.01μF; 0402≥0.22μF;			≤ 10%	0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF			≤ 12.5%	0402≥1μF; 0805≥10μF	10V	≤ 5%	≤ 10%	0201≥0.012μF; 0402≥0.22μF;			≤ 12.5%	0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF; 01R5/X5R	6.3V	≤ 10%	≤ 15%	0201≥0.1μF; 0402≥1μF; 0603≥10μF;			≤ 20%	0805≥4.7μF; 1206≥47μF; 1210≥100μF	4V	≤ 15%	---	0402≥2.2μF	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥50V	≤ 5%	≤ 7%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF			≤ 12.5%	1210≥6.8μF	35V	≤ 7%	---	---	25V	≤ 5%	≤ 7%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF;			≤ 9%	1206≥1μF; 1210≥4.7μF	16V	≤ 7%	≤ 9%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF;	(C<1.0μF)		≤ 12.5%	1210≥22μF	16V	≤ 9%	≤ 12.5%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF;	(C≥1.0μF)		≤ 12.5%	1210≥22μF; 1812≥47μF	10V	≤ 12.5%	≤ 20%	0402≥0.47μF	6.3V	≤ 20%	---	---	Y5R:			
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																																																																																																																																																																																									
≥100V	≤ 2.5%	≤ 3%	1206≥0.47μF																																																																																																																																																																																																																																								
		≤ 5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF;																																																																																																																																																																																																																																								
		≤ 10%	0805>0.22μF; 1210≥3.3μF																																																																																																																																																																																																																																								
50V	≤ 2.5%	≤ 3%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																																																																																																																																																																																																								
		≤ 5%	0201≥0.01μF; 1210≥3.3μF																																																																																																																																																																																																																																								
		≤ 10%	0402≥0.012μF; 0603>0.1μF; 0805/X7R>0.47μF;																																																																																																																																																																																																																																								
		≤ 12.5%	1206≥2.2μF; 1210≥10μF																																																																																																																																																																																																																																								
35V	≤ 3.5%	≤ 10%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																																																																																																																																																																																																								
		≤ 5%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																																																																																																																																																																																																																								
		≤ 7%	0603≥0.33μF																																																																																																																																																																																																																																								
		≤ 10%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF;																																																																																																																																																																																																																																								
		≤ 12.5%	0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																																																																																																																																																																																																								
25V	≤ 3.5%	≤ 5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF;																																																																																																																																																																																																																																								
		≤ 10%	0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																																																																																																																																																																																																																								
16V	≤ 3.5%	≤ 5%	0201/X7R≥0.022μF; 0402≥0.22μF;																																																																																																																																																																																																																																								
		≤ 10%	0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																																																																																																																																																																																																								
10V	≤ 5%	≤ 10%	0201≥0.012μF; 0402≥0.22μF;																																																																																																																																																																																																																																								
		≤ 15%	0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																																																																																																																																																																																																								
6.3V	≤ 10%	≤ 15%	0201≥0.1μF; 0402≥1μF;																																																																																																																																																																																																																																								
		≤ 20%	0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																																																																																																																																																																																																								
4V	≤ 15%	---	0402≥2.2μF																																																																																																																																																																																																																																								
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																																																																																																																																																																																									
≥100V	≤ 2.5%	≤ 3%	1206≥0.47μF																																																																																																																																																																																																																																								
		≤ 5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF																																																																																																																																																																																																																																								
		≤ 10%	0805>0.22μF; 1210≥3.3μF																																																																																																																																																																																																																																								
50V	≤ 2.5%	≤ 3%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																																																																																																																																																																																																								
		≤ 5%	0201≥0.01μF; 1210≥3.3μF																																																																																																																																																																																																																																								
		≤ 10%	0402≥0.012μF; 0603>0.1μF; 0805≥1μF; 1206≥2.2μF; 1210≥10μF																																																																																																																																																																																																																																								
		≤ 12.5%	1206≥10μF																																																																																																																																																																																																																																								
35V	≤ 3.5%	≤ 10%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																																																																																																																																																																																																								
		≤ 5%	0201≥0.01μF; 0805≥1μF																																																																																																																																																																																																																																								
		≤ 7%	0603≥0.33μF																																																																																																																																																																																																																																								
		≤ 10%	0201≥0.01μF; 0402≥0.10μF; 0603≥0.47μF;																																																																																																																																																																																																																																								
		≤ 12.5%	0805≥2.2μF; 1206≥4.7μF; 1210≥10μF																																																																																																																																																																																																																																								
25V	≤ 3.5%	≤ 5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF;																																																																																																																																																																																																																																								
		≤ 10%	0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																																																																																																																																																																																																																								
16V	≤ 3.5%	≤ 5%	0201≥0.01μF; 0402≥0.22μF;																																																																																																																																																																																																																																								
		≤ 10%	0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																																																																																																																																																																																																								
		≤ 12.5%	0402≥1μF; 0805≥10μF																																																																																																																																																																																																																																								
10V	≤ 5%	≤ 10%	0201≥0.012μF; 0402≥0.22μF;																																																																																																																																																																																																																																								
		≤ 12.5%	0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF; 01R5/X5R																																																																																																																																																																																																																																								
6.3V	≤ 10%	≤ 15%	0201≥0.1μF; 0402≥1μF; 0603≥10μF;																																																																																																																																																																																																																																								
		≤ 20%	0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																																																																																																																																																																																																								
4V	≤ 15%	---	0402≥2.2μF																																																																																																																																																																																																																																								
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																																																																																																																																																																																									
≥50V	≤ 5%	≤ 7%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF																																																																																																																																																																																																																																								
		≤ 12.5%	1210≥6.8μF																																																																																																																																																																																																																																								
35V	≤ 7%	---	---																																																																																																																																																																																																																																								
25V	≤ 5%	≤ 7%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF;																																																																																																																																																																																																																																								
		≤ 9%	1206≥1μF; 1210≥4.7μF																																																																																																																																																																																																																																								
16V	≤ 7%	≤ 9%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF;																																																																																																																																																																																																																																								
(C<1.0μF)		≤ 12.5%	1210≥22μF																																																																																																																																																																																																																																								
16V	≤ 9%	≤ 12.5%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF;																																																																																																																																																																																																																																								
(C≥1.0μF)		≤ 12.5%	1210≥22μF; 1812≥47μF																																																																																																																																																																																																																																								
10V	≤ 12.5%	≤ 20%	0402≥0.47μF																																																																																																																																																																																																																																								
6.3V	≤ 20%	---	---																																																																																																																																																																																																																																								
		*Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.																																																																																																																																																																																																																																									

\* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	Item	Test Condition		Requirements		
Q/D.F. (Dissipation Factor)	X6S:		X6S:		X6S:	
	≥ 100V	≤ 2.5%	Rated vol.			
			≤ 3%	1206 ≥ 0.47μF		
			≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF		
			≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF		
	50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF		
			≤ 5%	0201 ≥ 0.01μF; 1210 ≥ 3.3μF		
			≤ 10%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF		
			≤ 3.5%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF		
	25V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF		
			≤ 7%	0603 ≥ 0.33μF		
			≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.10μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF		
			≤ 12.5%	0402 ≥ 0.47μF; 0805 = 10μF		
	16V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF		
			≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.22μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF		
			≤ 12.5%	0402 ≥ 1μF; 0805 = 10μF		
			≤ 5%	0201 ≥ 0.012μF; 0402 ≥ 0.22μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF		
	10V	≤ 5%	≤ 10%	0805 = 10μF		
			≤ 12.5%	0201 ≥ 0.1μF; 0402 ≥ 1μF		
			≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 0.47μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF		
			≤ 20%	0402 ≥ 2.2μF		
	6.3V	≤ 10%	≤ 15%	0402 ≥ 2.2μF		
	4V	≤ 15%	---	---		
4. Dielectric Strength	X7S:		X7S:		X7S:	
	≥ 100V	≤ 2.5%	Rated vol.			
			≤ 3%	1206 ≥ 0.47μF		
			≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF		
			≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF		
	50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF		
			≤ 5%	0201 ≥ 0.01μF; 1210 ≥ 3.3μF		
			≤ 10%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF		
			≤ 3.5%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF		
	25V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF		
			≤ 7%	0603 ≥ 0.33μF		
			≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.10μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF		
			≤ 12.5%	0402 ≥ 0.47μF		
	16V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF		
			≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.22μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF		
			≤ 15%	0201 ≥ 0.012μF; 0402 ≥ 0.22μF;		
			≤ 20%	0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF		
	10V	≤ 5%	≤ 10%	0805 = 10μF		
	6.3V	≤ 10%	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF		
	4V	≤ 15%	---	---		

\* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	Item	Test Condition	Requirements																																																								
5.	Insulation Resistance	<p>*Test temp.: Room Temperature.</p> <p>*To apply rated voltage for MAX. 120sec.</p>	<p>10GΩ or <math>R_{xc} \geq 500\Omega \cdot F</math> whichever is smaller.</p> <p>Class II (X7R, X7E, X5R, X6S, X7S, Y5V):</p> <table border="1"> <tr> <td>Rated voltage</td> <td>Insulation Resistance</td> </tr> <tr> <td>100V: All X7R 50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF 35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF 25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF 16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF 10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF 6.3V ; 4V ; Size≥1812</td> <td>10GΩ or <math>R_{xc} \geq 100 \Omega \cdot F</math> whichever is smaller.</td> </tr> <tr> <td>Rated voltage</td> <td>Insulation Resistance</td> </tr> <tr> <td>All X6S items, All X7S items 100V: 1210≥3.3μF 50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF 35V: 0603≥1μF; 25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF 16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF 10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF 6.3V: 0201≥0.1μF; 0402≥1μF; 0603&gt;4.7μF; 0805≥47μF; 1206≥10μF 4V: 0603≥22μF; 0805≥47μF; 1206≥100μF</td> <td><math>R_{xc} \geq 50 \Omega \cdot F</math>.</td> </tr> </table>	Rated voltage	Insulation Resistance	100V: All X7R 50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF 35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF 25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF 16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF 10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF 6.3V ; 4V ; Size≥1812	10GΩ or $R_{xc} \geq 100 \Omega \cdot F$ whichever is smaller.	Rated voltage	Insulation Resistance	All X6S items, All X7S items 100V: 1210≥3.3μF 50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF 35V: 0603≥1μF; 25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF 16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF 10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF 6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF 4V: 0603≥22μF; 0805≥47μF; 1206≥100μF	$R_{xc} \geq 50 \Omega \cdot F$ .																																																
Rated voltage	Insulation Resistance																																																										
100V: All X7R 50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF 35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF 25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF 16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF 10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF 6.3V ; 4V ; Size≥1812	10GΩ or $R_{xc} \geq 100 \Omega \cdot F$ whichever is smaller.																																																										
Rated voltage	Insulation Resistance																																																										
All X6S items, All X7S items 100V: 1210≥3.3μF 50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF 35V: 0603≥1μF; 25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF 16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF 10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF 6.3V: 0201≥0.1μF; 0402≥1μF; 0603>4.7μF; 0805≥47μF; 1206≥10μF 4V: 0603≥22μF; 0805≥47μF; 1206≥100μF	$R_{xc} \geq 50 \Omega \cdot F$ .																																																										
6.	Temperature Coefficient	<p>With no electrical load.</p> <table border="1"> <tr> <td>T.C.</td> <td>Operating Temp</td> <td>T.C.</td> <td>Capacitance Change</td> </tr> <tr> <td>NPO</td> <td>-55~125°C at 25°C</td> <td>NPO</td> <td>Within ±30ppm/°C</td> </tr> <tr> <td>X7R</td> <td>-55~125°C at 25°C</td> <td>X7R</td> <td>Within ±15%</td> </tr> <tr> <td>X7S</td> <td>-55 ~ 125°C at 25°C</td> <td>X7S</td> <td>Within ±22%</td> </tr> <tr> <td>X5R</td> <td>-55~85°C at 25°C</td> <td>X5R</td> <td>Within ±15%</td> </tr> <tr> <td>X6S</td> <td>-55~105°C at 25°C</td> <td>X6S</td> <td>Within ±22%</td> </tr> <tr> <td>Y5V</td> <td>-25~85°C at 20°C</td> <td>Y5V</td> <td>Within +30%/-80%</td> </tr> </table> <p>*Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Measurement voltage for Class II:</p> <table border="1"> <tr> <td>01005</td> <td>0201</td> </tr> <tr> <td>Cap≤0.01μF: 0.5V</td> <td>Cap&lt;0.1μF: 1V</td> </tr> <tr> <td>Cap&gt;0.01μF: 0.2V</td> <td>0.1μF≤Cap&lt;1μF: 0.2V*</td> </tr> <tr> <td></td> <td>Cap≥1μF: 0.1V*</td> </tr> <tr> <td>*0201X104/6.3V~25V: 0.5V 0201X224/10V: 0.5V</td> <td>*0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&amp;10V: 0.3V</td> </tr> <tr> <td>0402</td> <td>0603</td> </tr> <tr> <td>Cap&lt;1μF: 1V</td> <td>Cap&lt;1μF: 1V</td> </tr> <tr> <td>Cap=1μF: 0.5V** 0402B224-16V: 0.5V 0402B474-10V: 0.5V 0402X475M6R3: 0.5V</td> <td>1μF≤Cap≤4.7μF: 0.5V</td> </tr> <tr> <td>1μF&lt;Cap&lt;10μF: 0.2V **0402B105M6R3V: 0.2V</td> <td>Cap&gt;4.7μF: 0.2V</td> </tr> <tr> <td>Cap≥10μF: 0.1V</td> <td></td> </tr> <tr> <td>0805</td> <td>1206/1210</td> </tr> <tr> <td>Cap&lt;10μF: 1V</td> <td>Cap≤10μF: 1V</td> </tr> <tr> <td>Cap=10μF: 0.5V 0805B475/6.3V~25V: 0.5V</td> <td>10μF&lt;Cap≤100μF: 0.5V</td> </tr> <tr> <td>Cap&gt;10μF: 0.2V</td> <td>Cap&gt;100μF: 0.2V</td> </tr> </table>	T.C.	Operating Temp	T.C.	Capacitance Change	NPO	-55~125°C at 25°C	NPO	Within ±30ppm/°C	X7R	-55~125°C at 25°C	X7R	Within ±15%	X7S	-55 ~ 125°C at 25°C	X7S	Within ±22%	X5R	-55~85°C at 25°C	X5R	Within ±15%	X6S	-55~105°C at 25°C	X6S	Within ±22%	Y5V	-25~85°C at 20°C	Y5V	Within +30%/-80%	01005	0201	Cap≤0.01μF: 0.5V	Cap<0.1μF: 1V	Cap>0.01μF: 0.2V	0.1μF≤Cap<1μF: 0.2V*		Cap≥1μF: 0.1V*	*0201X104/6.3V~25V: 0.5V 0201X224/10V: 0.5V	*0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V	0402	0603	Cap<1μF: 1V	Cap<1μF: 1V	Cap=1μF: 0.5V** 0402B224-16V: 0.5V 0402B474-10V: 0.5V 0402X475M6R3: 0.5V	1μF≤Cap≤4.7μF: 0.5V	1μF<Cap<10μF: 0.2V **0402B105M6R3V: 0.2V	Cap>4.7μF: 0.2V	Cap≥10μF: 0.1V		0805	1206/1210	Cap<10μF: 1V	Cap≤10μF: 1V	Cap=10μF: 0.5V 0805B475/6.3V~25V: 0.5V	10μF<Cap≤100μF: 0.5V	Cap>10μF: 0.2V	Cap>100μF: 0.2V	
T.C.	Operating Temp	T.C.	Capacitance Change																																																								
NPO	-55~125°C at 25°C	NPO	Within ±30ppm/°C																																																								
X7R	-55~125°C at 25°C	X7R	Within ±15%																																																								
X7S	-55 ~ 125°C at 25°C	X7S	Within ±22%																																																								
X5R	-55~85°C at 25°C	X5R	Within ±15%																																																								
X6S	-55~105°C at 25°C	X6S	Within ±22%																																																								
Y5V	-25~85°C at 20°C	Y5V	Within +30%/-80%																																																								
01005	0201																																																										
Cap≤0.01μF: 0.5V	Cap<0.1μF: 1V																																																										
Cap>0.01μF: 0.2V	0.1μF≤Cap<1μF: 0.2V*																																																										
	Cap≥1μF: 0.1V*																																																										
*0201X104/6.3V~25V: 0.5V 0201X224/10V: 0.5V	*0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V																																																										
0402	0603																																																										
Cap<1μF: 1V	Cap<1μF: 1V																																																										
Cap=1μF: 0.5V** 0402B224-16V: 0.5V 0402B474-10V: 0.5V 0402X475M6R3: 0.5V	1μF≤Cap≤4.7μF: 0.5V																																																										
1μF<Cap<10μF: 0.2V **0402B105M6R3V: 0.2V	Cap>4.7μF: 0.2V																																																										
Cap≥10μF: 0.1V																																																											
0805	1206/1210																																																										
Cap<10μF: 1V	Cap≤10μF: 1V																																																										
Cap=10μF: 0.5V 0805B475/6.3V~25V: 0.5V	10μF<Cap≤100μF: 0.5V																																																										
Cap>10μF: 0.2V	Cap>100μF: 0.2V																																																										

\* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	Item	Test Condition	Requirements															
7.	Adhesive Strength of Termination	* Pressurizing force : 2N (0201) and 5N ( $\leq$ 0603) and 10N ( $>$ 0603) * Test time: 10±1 sec.	* No remarkable damage or removal of the terminations.															
8.	Vibration Resistance	* Vibration frequency: 10-55 Hz/min. * Total amplitude: 1.5mm * Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.) * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap./DF(Q) Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap change and Q/D.F.: To meet initial spec.															
9.	Solderability	* Solder temperature: 235±5°C * Dipping time: 2±0.5 sec.	95% min. coverage of all metallized area.															
10.	Bending Test	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm and then the pressure shall be maintained for 5±1 sec. * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change : NP0: within ±5% or 0.5pF whichever is larger X7R, X5R, X6S, X7S: within ±12.5% Y5V: within ±30% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)															
11.	Resistance to Soldering Heat	* Solder temperature: 260±5°C * Dipping time: 10±1 sec * Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder. * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap change: NP0: within ±2.5% or 0.25pF whichever is larger X7R, X5R, X6S, X7S: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. * 25% max. leaching on each edge.															
12.	Temperature Cycle	* Conduct the five cycles according to the temperatures and time. <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <th>Step</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> <tr> <td>1</td> <td>Min. operating temp. +0/-3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>2-3</td> </tr> <tr> <td>3</td> <td>Max. operating temp. +3/-0</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>2-3</td> </tr> </table> * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	Step	Temp. (°C)	Time (min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2-3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2-3	* No remarkable damage. * Cap change : NP0: within ±2.5% or 0.25pF whichever is larger X7R, X5R, X6S, X7S: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements.
Step	Temp. (°C)	Time (min.)																
1	Min. operating temp. +0/-3	30±3																
2	Room temp.	2-3																
3	Max. operating temp. +3/-0	30±3																
4	Room temp.	2-3																

\* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	Item	Test Condition	Requirements																																																																																																											
13.	Humidity (Damp Heat) Steady State	<ul style="list-style-type: none"> <li>* Test temp.: <math>40 \pm 2^\circ\text{C}</math></li> <li>* Humidity: 90~95%RH</li> <li>* Test time: 500+24+0hrs.</li> <li>* Before initial measurement (Class II only): To apply de-aging at <math>150^\circ\text{C}</math> for 1hr then set for <math>24 \pm 2</math> hrs at room temp.</li> <li>* Cap. / DF(Q) / I.R. Measurement to be made after de-aging at <math>150^\circ\text{C}</math> for 1hr then set for <math>24 \pm 2</math> hrs at room temp.</li> </ul>	<ul style="list-style-type: none"> <li>* No remarkable damage.</li> <li>* Cap change: NPO: within <math>\pm 5\%</math> or <math>0.5\mu\text{F}</math> whichever is larger X7R, X5R, X6S, X7S: <math>\geq 10\text{V}^{**}</math>, within <math>\pm 12.5\%</math>; <math>\leq 6.3\text{V}</math> within <math>\pm 25\%</math>; **10V: 0603 <math>\geq 4.7\mu\text{F}</math>; 0402 <math>\geq 1\mu\text{F}</math>; 0201 <math>\geq 0.1\mu\text{F}</math>, within <math>\pm 25\%</math>; Y5V: <math>\geq 10\text{V}</math>, within <math>\pm 30\%</math>; <math>\leq 6.3\text{V}</math>, within <math>+30/-40\%</math></li> <li>* Q/D.F. value: NP0: More than <math>30\text{pF}</math> <math>Q \geq 350</math>, <math>10\text{pF} \leq C &lt; 30\text{pF}</math>, <math>Q \geq 275 + 2.5\text{C}</math> Less than <math>10\text{pF}</math> <math>Q \geq 200 + 10\text{C}</math></li> </ul> <p>X7R, X5R, X6S, X7S:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Rated vol.</th> <th>D.F. <math>\leq</math></th> <th colspan="2">Exception of D.F. <math>\leq</math></th> </tr> </thead> <tbody> <tr> <td rowspan="3"><math>\geq 100\text{V}</math></td> <td rowspan="3"><math>\leq 3\%</math></td> <td><math>\leq 6\%</math></td> <td>1206 <math>\geq 0.47\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 7.5\%</math></td> <td>0603 <math>\geq 0.068\mu\text{F}</math>; 0805 <math>\geq 0.1\mu\text{F}</math>; 1206 <math>\geq 1\mu\text{F}</math>; 1210 <math>\geq 2.2\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td>0805 <math>\geq 0.22\mu\text{F}</math>; 1210 <math>\geq 3.3\mu\text{F}</math></td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3"><math>\leq 3\%</math></td> <td><math>\leq 6\%</math></td> <td>0201(50V); 0603 <math>\geq 0.047\mu\text{F}</math>; 0805 <math>\geq 0.18\mu\text{F}</math>; 1206 <math>\geq 0.47\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 10\%</math></td> <td>0201 <math>\geq 0.01\mu\text{F}</math>; 1210 <math>\geq 3.3\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td>0402 <math>\geq 0.012\mu\text{F}</math>; 0603 <math>&gt; 0.1\mu\text{F}</math>; 0805 <math>\geq 1\mu\text{F}</math> (0805/X7R <math>&gt; 0.47\mu\text{F}</math>); 1206 <math>\geq 2.2\mu\text{F}</math>; 1210 <math>\geq 10\mu\text{F}</math></td> </tr> <tr> <td rowspan="3">35V</td> <td rowspan="3"><math>\leq 5\%</math></td> <td><math>\leq 20\%</math></td> <td>0603 <math>\geq 1\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 2.2\mu\text{F}</math>; 1210 <math>\geq 10\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 10\%</math></td> <td>0201 <math>= 0.01\mu\text{F}</math>; 0805 <math>\geq 1\mu\text{F}</math>; 1210 <math>\geq 10\mu\text{F}</math>*</td> </tr> <tr> <td><math>\leq 14\%</math></td> <td>0603 <math>\geq 0.33\mu\text{F}</math></td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3"><math>\leq 5\%</math></td> <td><math>\leq 15\%</math></td> <td>0201 <math>&gt; 0.01\mu\text{F}</math>; 0402 <math>\geq 0.10\mu\text{F}</math> (0402/X7R <math>\geq 0.056\mu\text{F}</math>); 0603 <math>\geq 0.47\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 4.7\mu\text{F}</math>; 1210 <math>\geq 22\mu\text{F}</math> (1210/X5R <math>\geq 10\mu\text{F}</math>)*</td> </tr> <tr> <td><math>\leq 20\%</math></td> <td>0402 <math>\geq 0.47\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 10\%</math></td> <td>0603 <math>\geq 0.15\mu\text{F}</math>; 0805 <math>\geq 0.68\mu\text{F}</math>; 1206 <math>\geq 2.2\mu\text{F}</math>; 1210 <math>\geq 4.7\mu\text{F}</math></td> </tr> <tr> <td rowspan="3">16V</td> <td rowspan="3"><math>\leq 5\%</math></td> <td><math>\leq 15\%</math></td> <td>0201 <math>\geq 0.01\mu\text{F}</math> (0201/X7R <math>\geq 0.022\mu\text{F}</math>); 0402 <math>\geq 0.033\mu\text{F}</math>; 0603 <math>&gt; 0.47\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 4.7\mu\text{F}</math>; 1210 <math>\geq 22\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 7.5\%</math></td> <td><math>\leq 15\%</math></td> <td>0201 <math>\geq 0.012\mu\text{F}</math>; 0402 <math>\geq 0.22\mu\text{F}</math>; 0603 <math>\geq 0.33\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 2.2\mu\text{F}</math>; 1210 <math>\geq 22\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td>0201 <math>\geq 0.1\mu\text{F}</math>; 0402 <math>\geq 1\mu\text{F}</math>; 0603 <math>\geq 10\mu\text{F}</math>; 01R5/X5R</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2"><math>\leq 15\%</math></td> <td><math>\leq 30\%</math></td> <td>0201 <math>\geq 0.1\mu\text{F}</math>; 0402 <math>\geq 1\mu\text{F}</math> (0402/X6S <math>\geq 0.47\mu\text{F}</math>); 0603 <math>\geq 10\mu\text{F}</math>; 0805 <math>\geq 4.7\mu\text{F}</math>; 1206 <math>\geq 47\mu\text{F}</math>; 1210 <math>\geq 100\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td>---</td> </tr> <tr> <td>4V</td> <td><math>\leq 20\%</math></td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>Y5V:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Rated vol.</th> <th>D.F. <math>\leq</math></th> <th colspan="2">Exception of D.F. <math>\leq</math></th> </tr> </thead> <tbody> <tr> <td rowspan="2"><math>\geq 50\text{V}</math></td> <td rowspan="2"><math>\leq 7.5\%</math></td> <td><math>\leq 10\%</math></td> <td>0603 <math>\geq 0.1\mu\text{F}</math>; 0805 <math>\geq 0.47\mu\text{F}</math>; 1206 <math>\geq 4.7\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td>1210 <math>\geq 6.8\mu\text{F}</math></td> </tr> <tr> <td>35V</td> <td><math>\leq 10\%</math></td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3"><math>\leq 7.5\%</math></td> <td><math>\leq 10\%</math></td> <td>0402 <math>\geq 0.047\mu\text{F}</math>; 0603 <math>\geq 0.1\mu\text{F}</math>; 0805 <math>\geq 0.33\mu\text{F}</math>; 1206 <math>\geq 1\mu\text{F}</math>; 1210 <math>\geq 4.7\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 15\%</math></td> <td>0402 <math>\geq 0.068\mu\text{F}</math>; 0603 <math>\geq 0.47\mu\text{F}</math>; 1206 <math>\geq 4.7\mu\text{F}</math>; 1210 <math>\geq 22\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td>0402 <math>\geq 0.22\mu\text{F}</math></td> </tr> <tr> <td rowspan="2">16V (C<math>\geq 1.0\mu\text{F}</math>)</td> <td rowspan="2"><math>\leq 10\%</math></td> <td><math>\leq 12.5\%</math></td> <td>0402 <math>\geq 0.068\mu\text{F}</math>; 0603 <math>\geq 0.68\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td>0402 <math>\geq 0.22\mu\text{F}</math></td> </tr> <tr> <td rowspan="2">16V (C <math>\geq 1.0\mu\text{F}</math>)</td> <td rowspan="2"><math>\leq 12.5\%</math></td> <td><math>\leq 20\%</math></td> <td>0603 <math>\geq 2.2\mu\text{F}</math>; 0805 <math>\geq 3.3\mu\text{F}</math>; 1206 <math>\geq 10\mu\text{F}</math>; 1210 <math>\geq 22\mu\text{F}</math>; 1812 <math>\geq 47\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td>0402 <math>\geq 0.47\mu\text{F}</math></td> </tr> <tr> <td>10V</td> <td><math>\leq 20\%</math></td> <td><math>\leq 30\%</math></td> <td>0402 <math>\geq 0.47\mu\text{F}</math></td> </tr> <tr> <td>6.3V</td> <td><math>\leq 30\%</math></td> <td>--</td> <td>--</td> </tr> </tbody> </table> <p>*I.R.: <math>\geq 10\text{V}</math>, <math>1\text{G}\Omega</math> or <math>50\text{ Q}\cdot\text{F}</math> whichever is smaller.</p> <p>Class II (X7R, X5R, X6S, X7S, Y5V)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R; 1210 <math>\geq 3.3\mu\text{F}</math></td> <td rowspan="7">1<math>\text{G}\Omega</math> or <math>R_{\text{XC}} \geq 10\text{ Q}\cdot\text{F}</math> whichever is smaller.</td> </tr> <tr> <td>50V: 0402 <math>&gt; 0.01\mu\text{F}</math>; 0603 <math>\geq 1\mu\text{F}</math>; 0805 <math>\geq 1\mu\text{F}</math>; 1206 <math>\geq 4.7\mu\text{F}</math>; 1210 <math>\geq 4.7\mu\text{F}</math></td> </tr> <tr> <td>35V: 0603 <math>\geq 1\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 2.2\mu\text{F}</math>; 1210 <math>\geq 10\mu\text{F}</math></td> </tr> <tr> <td>25V: 0201 <math>\geq 0.1\mu\text{F}</math>; 0402 <math>\geq 0.22\mu\text{F}</math>; 0603 <math>\geq 2.2\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 10\mu\text{F}</math>; 1210 <math>\geq 10\mu\text{F}</math></td> </tr> <tr> <td>16V: 0201 <math>\geq 0.1\mu\text{F}</math>; 0402 <math>\geq 0.22\mu\text{F}</math>; 0603 <math>\geq 1\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 10\mu\text{F}</math>; 1210 <math>\geq 47\mu\text{F}</math></td> </tr> <tr> <td>10V: 0201 <math>\geq 47\text{nF}</math>; 0402 <math>\geq 0.47\mu\text{F}</math>; 0603 <math>\geq 0.47\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 4.7\mu\text{F}</math>; 1210 <math>\geq 47\mu\text{F}</math></td> </tr> <tr> <td>6.3V ; 4V ; All X6S/X7S items; Size <math>\geq 1812</math></td> </tr> </tbody> </table>	Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$		$\geq 100\text{V}$	$\leq 3\%$	$\leq 6\%$	1206 $\geq 0.47\mu\text{F}$	$\leq 7.5\%$	0603 $\geq 0.068\mu\text{F}$ ; 0805 $\geq 0.1\mu\text{F}$ ; 1206 $\geq 1\mu\text{F}$ ; 1210 $\geq 2.2\mu\text{F}$	$\leq 20\%$	0805 $\geq 0.22\mu\text{F}$ ; 1210 $\geq 3.3\mu\text{F}$	50V	$\leq 3\%$	$\leq 6\%$	0201(50V); 0603 $\geq 0.047\mu\text{F}$ ; 0805 $\geq 0.18\mu\text{F}$ ; 1206 $\geq 0.47\mu\text{F}$	$\leq 10\%$	0201 $\geq 0.01\mu\text{F}$ ; 1210 $\geq 3.3\mu\text{F}$	$\leq 20\%$	0402 $\geq 0.012\mu\text{F}$ ; 0603 $> 0.1\mu\text{F}$ ; 0805 $\geq 1\mu\text{F}$ (0805/X7R $> 0.47\mu\text{F}$ ); 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$	35V	$\leq 5\%$	$\leq 20\%$	0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$	$\leq 10\%$	0201 $= 0.01\mu\text{F}$ ; 0805 $\geq 1\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$ *	$\leq 14\%$	0603 $\geq 0.33\mu\text{F}$	25V	$\leq 5\%$	$\leq 15\%$	0201 $> 0.01\mu\text{F}$ ; 0402 $\geq 0.10\mu\text{F}$ (0402/X7R $\geq 0.056\mu\text{F}$ ); 0603 $\geq 0.47\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 22\mu\text{F}$ (1210/X5R $\geq 10\mu\text{F}$ )*	$\leq 20\%$	0402 $\geq 0.47\mu\text{F}$	$\leq 10\%$	0603 $\geq 0.15\mu\text{F}$ ; 0805 $\geq 0.68\mu\text{F}$ ; 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 4.7\mu\text{F}$	16V	$\leq 5\%$	$\leq 15\%$	0201 $\geq 0.01\mu\text{F}$ (0201/X7R $\geq 0.022\mu\text{F}$ ); 0402 $\geq 0.033\mu\text{F}$ ; 0603 $> 0.47\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 22\mu\text{F}$	$\leq 7.5\%$	$\leq 15\%$	0201 $\geq 0.012\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 0.33\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 22\mu\text{F}$	$\leq 20\%$	0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 1\mu\text{F}$ ; 0603 $\geq 10\mu\text{F}$ ; 01R5/X5R	10V	$\leq 15\%$	$\leq 30\%$	0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 1\mu\text{F}$ (0402/X6S $\geq 0.47\mu\text{F}$ ); 0603 $\geq 10\mu\text{F}$ ; 0805 $\geq 4.7\mu\text{F}$ ; 1206 $\geq 47\mu\text{F}$ ; 1210 $\geq 100\mu\text{F}$	$\leq 20\%$	---	4V	$\leq 20\%$	---	---	Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$		$\geq 50\text{V}$	$\leq 7.5\%$	$\leq 10\%$	0603 $\geq 0.1\mu\text{F}$ ; 0805 $\geq 0.47\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$	$\leq 20\%$	1210 $\geq 6.8\mu\text{F}$	35V	$\leq 10\%$	---	---	25V	$\leq 7.5\%$	$\leq 10\%$	0402 $\geq 0.047\mu\text{F}$ ; 0603 $\geq 0.1\mu\text{F}$ ; 0805 $\geq 0.33\mu\text{F}$ ; 1206 $\geq 1\mu\text{F}$ ; 1210 $\geq 4.7\mu\text{F}$	$\leq 15\%$	0402 $\geq 0.068\mu\text{F}$ ; 0603 $\geq 0.47\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 22\mu\text{F}$	$\leq 20\%$	0402 $\geq 0.22\mu\text{F}$	16V (C $\geq 1.0\mu\text{F}$ )	$\leq 10\%$	$\leq 12.5\%$	0402 $\geq 0.068\mu\text{F}$ ; 0603 $\geq 0.68\mu\text{F}$	$\leq 20\%$	0402 $\geq 0.22\mu\text{F}$	16V (C $\geq 1.0\mu\text{F}$ )	$\leq 12.5\%$	$\leq 20\%$	0603 $\geq 2.2\mu\text{F}$ ; 0805 $\geq 3.3\mu\text{F}$ ; 1206 $\geq 10\mu\text{F}$ ; 1210 $\geq 22\mu\text{F}$ ; 1812 $\geq 47\mu\text{F}$	$\leq 20\%$	0402 $\geq 0.47\mu\text{F}$	10V	$\leq 20\%$	$\leq 30\%$	0402 $\geq 0.47\mu\text{F}$	6.3V	$\leq 30\%$	--	--	Rated voltage	Insulation Resistance	100V: All X7R; 1210 $\geq 3.3\mu\text{F}$	1 $\text{G}\Omega$ or $R_{\text{XC}} \geq 10\text{ Q}\cdot\text{F}$ whichever is smaller.	50V: 0402 $> 0.01\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 1\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 4.7\mu\text{F}$	35V: 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$	25V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 2.2\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 10\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$	16V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 10\mu\text{F}$ ; 1210 $\geq 47\mu\text{F}$	10V: 0201 $\geq 47\text{nF}$ ; 0402 $\geq 0.47\mu\text{F}$ ; 0603 $\geq 0.47\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 47\mu\text{F}$	6.3V ; 4V ; All X6S/X7S items; Size $\geq 1812$
Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$																																																																																																												
$\geq 100\text{V}$	$\leq 3\%$	$\leq 6\%$	1206 $\geq 0.47\mu\text{F}$																																																																																																											
		$\leq 7.5\%$	0603 $\geq 0.068\mu\text{F}$ ; 0805 $\geq 0.1\mu\text{F}$ ; 1206 $\geq 1\mu\text{F}$ ; 1210 $\geq 2.2\mu\text{F}$																																																																																																											
		$\leq 20\%$	0805 $\geq 0.22\mu\text{F}$ ; 1210 $\geq 3.3\mu\text{F}$																																																																																																											
50V	$\leq 3\%$	$\leq 6\%$	0201(50V); 0603 $\geq 0.047\mu\text{F}$ ; 0805 $\geq 0.18\mu\text{F}$ ; 1206 $\geq 0.47\mu\text{F}$																																																																																																											
		$\leq 10\%$	0201 $\geq 0.01\mu\text{F}$ ; 1210 $\geq 3.3\mu\text{F}$																																																																																																											
		$\leq 20\%$	0402 $\geq 0.012\mu\text{F}$ ; 0603 $> 0.1\mu\text{F}$ ; 0805 $\geq 1\mu\text{F}$ (0805/X7R $> 0.47\mu\text{F}$ ); 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$																																																																																																											
35V	$\leq 5\%$	$\leq 20\%$	0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$																																																																																																											
		$\leq 10\%$	0201 $= 0.01\mu\text{F}$ ; 0805 $\geq 1\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$ *																																																																																																											
		$\leq 14\%$	0603 $\geq 0.33\mu\text{F}$																																																																																																											
25V	$\leq 5\%$	$\leq 15\%$	0201 $> 0.01\mu\text{F}$ ; 0402 $\geq 0.10\mu\text{F}$ (0402/X7R $\geq 0.056\mu\text{F}$ ); 0603 $\geq 0.47\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 22\mu\text{F}$ (1210/X5R $\geq 10\mu\text{F}$ )*																																																																																																											
		$\leq 20\%$	0402 $\geq 0.47\mu\text{F}$																																																																																																											
		$\leq 10\%$	0603 $\geq 0.15\mu\text{F}$ ; 0805 $\geq 0.68\mu\text{F}$ ; 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 4.7\mu\text{F}$																																																																																																											
16V	$\leq 5\%$	$\leq 15\%$	0201 $\geq 0.01\mu\text{F}$ (0201/X7R $\geq 0.022\mu\text{F}$ ); 0402 $\geq 0.033\mu\text{F}$ ; 0603 $> 0.47\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 22\mu\text{F}$																																																																																																											
		$\leq 7.5\%$	$\leq 15\%$	0201 $\geq 0.012\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 0.33\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 22\mu\text{F}$																																																																																																										
		$\leq 20\%$	0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 1\mu\text{F}$ ; 0603 $\geq 10\mu\text{F}$ ; 01R5/X5R																																																																																																											
10V	$\leq 15\%$	$\leq 30\%$	0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 1\mu\text{F}$ (0402/X6S $\geq 0.47\mu\text{F}$ ); 0603 $\geq 10\mu\text{F}$ ; 0805 $\geq 4.7\mu\text{F}$ ; 1206 $\geq 47\mu\text{F}$ ; 1210 $\geq 100\mu\text{F}$																																																																																																											
		$\leq 20\%$	---																																																																																																											
4V	$\leq 20\%$	---	---																																																																																																											
Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$																																																																																																												
$\geq 50\text{V}$	$\leq 7.5\%$	$\leq 10\%$	0603 $\geq 0.1\mu\text{F}$ ; 0805 $\geq 0.47\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$																																																																																																											
		$\leq 20\%$	1210 $\geq 6.8\mu\text{F}$																																																																																																											
35V	$\leq 10\%$	---	---																																																																																																											
25V	$\leq 7.5\%$	$\leq 10\%$	0402 $\geq 0.047\mu\text{F}$ ; 0603 $\geq 0.1\mu\text{F}$ ; 0805 $\geq 0.33\mu\text{F}$ ; 1206 $\geq 1\mu\text{F}$ ; 1210 $\geq 4.7\mu\text{F}$																																																																																																											
		$\leq 15\%$	0402 $\geq 0.068\mu\text{F}$ ; 0603 $\geq 0.47\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 22\mu\text{F}$																																																																																																											
		$\leq 20\%$	0402 $\geq 0.22\mu\text{F}$																																																																																																											
16V (C $\geq 1.0\mu\text{F}$ )	$\leq 10\%$	$\leq 12.5\%$	0402 $\geq 0.068\mu\text{F}$ ; 0603 $\geq 0.68\mu\text{F}$																																																																																																											
		$\leq 20\%$	0402 $\geq 0.22\mu\text{F}$																																																																																																											
16V (C $\geq 1.0\mu\text{F}$ )	$\leq 12.5\%$	$\leq 20\%$	0603 $\geq 2.2\mu\text{F}$ ; 0805 $\geq 3.3\mu\text{F}$ ; 1206 $\geq 10\mu\text{F}$ ; 1210 $\geq 22\mu\text{F}$ ; 1812 $\geq 47\mu\text{F}$																																																																																																											
		$\leq 20\%$	0402 $\geq 0.47\mu\text{F}$																																																																																																											
10V	$\leq 20\%$	$\leq 30\%$	0402 $\geq 0.47\mu\text{F}$																																																																																																											
6.3V	$\leq 30\%$	--	--																																																																																																											
Rated voltage	Insulation Resistance																																																																																																													
100V: All X7R; 1210 $\geq 3.3\mu\text{F}$	1 $\text{G}\Omega$ or $R_{\text{XC}} \geq 10\text{ Q}\cdot\text{F}$ whichever is smaller.																																																																																																													
50V: 0402 $> 0.01\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 1\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 4.7\mu\text{F}$																																																																																																														
35V: 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$																																																																																																														
25V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 2.2\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 10\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$																																																																																																														
16V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 10\mu\text{F}$ ; 1210 $\geq 47\mu\text{F}$																																																																																																														
10V: 0201 $\geq 47\text{nF}$ ; 0402 $\geq 0.47\mu\text{F}$ ; 0603 $\geq 0.47\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 47\mu\text{F}$																																																																																																														
6.3V ; 4V ; All X6S/X7S items; Size $\geq 1812$																																																																																																														


\* "Room condition" Temperature: 15 to  $35^\circ\text{C}$ , Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No	Item	Test Condition	Requirements																																																																																														
14	Humidity (Damp Heat) Load	<p>* Test temp. : <math>40 \pm 2^\circ\text{C}</math>            * Humidity : 90~95%RH            * Test time : 500+24/-0 hrs.            * To apply voltage :                Rated voltage (MAX. 500V)            * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.            * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.</p>	<p>* No remarkable damage.            Cap change:            NPO: ±7.5% or 0.75pF whichever is larger.            X7R, X5R, X6S, X7S: <math>\geq 10V^{**}</math>, within ±12.5%; <math>\leq 6.3V</math> within ±25%;            **10V: 0603 <math>\geq 4.7\mu\text{F}</math>; 0402 <math>\geq 1\mu\text{F}</math>; 0201 <math>\geq 0.1\mu\text{F}</math>, within ±25%;            Y5V: <math>\geq 10V</math>, within ±30%; <math>\leq 6.3V</math>, within +30/-40%            Q/D.F. value:            NP0: <math>C \geq 30\text{pF}, Q \geq 200; C &lt; 30\text{pF}, Q \geq 100 + 10/3C</math>            X7R, X5R, X6S, X7S:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. <math>\leq</math></th> <th>Exception of D.F. <math>\leq</math></th> </tr> </thead> <tbody> <tr> <td rowspan="3"><math>\geq 100V</math></td> <td><math>\leq 3\%</math></td> <td><math>\leq 6\% 1206 \geq 0.47\mu\text{F}</math>  <math>\leq 7.5\% 0603 \geq 0.068\mu\text{F}; 0805 \geq 0.1\mu\text{F}; 1206 \geq 1\mu\text{F}; 1210 \geq 2.2\mu\text{F}</math>  <math>\leq 20\% 0805 \geq 0.22\mu\text{F}; 1210 \geq 3.3\mu\text{F}</math></td> </tr> <tr> <td rowspan="3">50V</td> <td><math>\leq 3\%</math></td> <td><math>\leq 6\% 0201(50V); 0603 \geq 0.047\mu\text{F}; 0805 \geq 0.18\mu\text{F}; 1206 \geq 0.47\mu\text{F}</math>  <math>\leq 10\% 0201 \geq 0.01\mu\text{F}; 1210 \geq 3.3\mu\text{F}</math>  <math>\leq 20\% 0402 \geq 0.012\mu\text{F}; 0603 &gt; 0.1\mu\text{F}; 0805 \geq 1\mu\text{F}(0805/X7R &gt; 0.47\mu\text{F});</math>  <math>1206 \geq 2.2\mu\text{F}; 1210 \geq 10\mu\text{F};</math></td> </tr> <tr> <td><math>\leq 5\%</math></td> <td><math>\leq 20\% 0603 \geq 1\mu\text{F}; 0805 \geq 2.2\mu\text{F}; 1206 \geq 2.2\mu\text{F}; 1210 \geq 10\mu\text{F}</math>  <math>\leq 10\% 0201 \geq 0.01\mu\text{F}(0201/X5R = 0.01\mu\text{F}); 0805 \geq 1\mu\text{F}; 1210 \geq 10\mu\text{F}^*</math>  <math>\leq 14\% 0603 \geq 0.33\mu\text{F}</math></td> </tr> <tr> <td rowspan="3">25V</td> <td><math>\leq 5\%</math></td> <td><math>\leq 15\% 0201 \geq 0.1\mu\text{F}(0201/X5R &gt; 0.01\mu\text{F}); 0603 \geq 0.47\mu\text{F}; \text{TTseries}</math>  <math>0402 \geq 0.10\mu\text{F}(0402/X7R \geq 0.056\mu\text{F}); 0805 \geq 2.2\mu\text{F};</math>  <math>1206 \geq 4.7\mu\text{F}; 1210 \geq 22\mu\text{F}(1210/X5R \geq 10\mu\text{F})^*</math>  <math>\leq 20\% 0402 \geq 0.47\mu\text{F}</math></td> </tr> <tr> <td rowspan="3">16V</td> <td><math>\leq 5\%</math></td> <td><math>\leq 10\% 0603 \geq 0.15\mu\text{F}; 0805 \geq 0.68\mu\text{F}; 1206 \geq 2.2\mu\text{F}; 1210 \geq 4.7\mu\text{F}</math>  <math>\leq 15\% 0201 \geq 0.01\mu\text{F}(0201/X7R \geq 0.022\mu\text{F}); 0402 \geq 0.033\mu\text{F};</math>  <math>0603 &gt; 0.47\mu\text{F}; 0805 \geq 2.2\mu\text{F}; 1206 \geq 4.7\mu\text{F}; 1210 \geq 22\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 7.5\%</math></td> <td><math>\leq 15\% 0201 \geq 0.012\mu\text{F}; 0402 \geq 0.22\mu\text{F};</math>  <math>0603 \geq 0.33\mu\text{F}; 0805 \geq 2.2\mu\text{F}; 1206 \geq 2.2\mu\text{F}; 1210 \geq 22\mu\text{F}</math>  <math>\leq 20\% 0201 \geq 0.1\mu\text{F}; 0402 \geq 1\mu\text{F}; 0603/X5R \geq 10\mu\text{F}; 01R5/X5R</math></td> </tr> <tr> <td>10V</td> <td><math>\leq 15\%</math></td> <td><math>0201 \geq 0.1\mu\text{F}; 0402 \geq 1\mu\text{F}(0402/X6S \geq 0.47\mu\text{F});</math>  <math>0603 \geq 10\mu\text{F}; 0805 \geq 4.7\mu\text{F}; 1206 \geq 47\mu\text{F}; 1210 \geq 100\mu\text{F}</math></td> </tr> <tr> <td>6.3V</td> <td><math>\leq 30\%</math></td> <td>---</td> </tr> <tr> <td>4V</td> <td><math>\leq 20\%</math></td> <td>---</td> </tr> <tr> <td colspan="4">Y5V:</td> </tr> <tr> <td rowspan="9">Rated vol.</td> <td><math>\leq 7.5\%</math></td> <td><math>\leq 10\% 0603 \geq 0.1\mu\text{F}; 0805 \geq 0.47\mu\text{F}; 1206 \geq 4.7\mu\text{F}</math>  <math>\leq 20\% 1210 \geq 6.8\mu\text{F}</math></td> </tr> <tr> <td rowspan="3">35V</td> <td><math>\leq 10\%</math></td> <td>---</td> </tr> <tr> <td><math>\leq 7.5\%</math></td> <td><math>\leq 10\% 0402 \geq 0.047\mu\text{F}; 0603 \geq 0.1\mu\text{F};</math>  <math>0805 \geq 0.33\mu\text{F}; 1206 \geq 1\mu\text{F}; 1210 \geq 4.7\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 15\%</math></td> <td><math>0402 \geq 0.068\mu\text{F}; 0603 \geq 0.47\mu\text{F};</math>  <math>1206 \geq 4.7\mu\text{F}; 1210 \geq 22\mu\text{F}</math></td> </tr> <tr> <td rowspan="3">25V</td> <td><math>\leq 10\%</math></td> <td><math>\leq 12.5\% 0402 \geq 0.068\mu\text{F}; 0603 \geq 0.68\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td><math>0402 \geq 0.22\mu\text{F}</math></td> </tr> <tr> <td><math>\leq 12.5\%</math></td> <td><math>0603 \geq 2.2\mu\text{F}; 0805 \geq 3.3\mu\text{F};</math>  <math>1206 \geq 10\mu\text{F}; 1210 \geq 22\mu\text{F}; 1812 \geq 47\mu\text{F}</math></td> </tr> <tr> <td>16V</td> <td><math>\leq 20\%</math></td> <td><math>0402 \geq 0.22\mu\text{F}</math></td> </tr> <tr> <td>16V (<math>C &lt; 1\mu\text{F}</math>)</td> <td><math>\leq 30\%</math></td> <td><math>0402 \geq 0.47\mu\text{F}</math></td> </tr> <tr> <td>16V (<math>C \geq 1.0\mu\text{F}</math>)</td> <td><math>\leq 20\%</math></td> <td><math>0603 \geq 2.2\mu\text{F}; 0805 \geq 3.3\mu\text{F};</math>  <math>1206 \geq 10\mu\text{F}; 1210 \geq 22\mu\text{F}; 1812 \geq 47\mu\text{F}</math></td> </tr> <tr> <td>10V</td> <td><math>\leq 20\%</math></td> <td><math>0402 \geq 0.47\mu\text{F}</math></td> </tr> <tr> <td>6.3V</td> <td><math>\leq 30\%</math></td> <td>---</td> </tr> <tr> <td colspan="4">*I.R.: <math>\geq 10V</math>, <math>500M\Omega</math> or <math>25 \Omega\text{-F}</math> whichever is smaller. Class II (X7R, X5R, X6S, X7S, Y5V)</td> </tr> <tr> <td colspan="3">Rated voltage</td> <td>Insulation Resistance</td> </tr> <tr> <td colspan="3">100V: All X7R; 1210 <math>\geq 3.3\mu\text{F}</math></td> <td rowspan="7">500MΩ or <math>RxC \geq 5 \Omega\text{-F}</math> whichever is smaller.</td> </tr> <tr> <td colspan="3">50V: 0402 <math>\geq 0.01\mu\text{F}</math>; 0603 <math>\geq 1\mu\text{F}</math>; 0805 <math>\geq 1\mu\text{F}</math>; 1206 <math>\geq 4.7\mu\text{F}</math>; 1210 <math>\geq 4.7\mu\text{F}</math></td> </tr> <tr> <td colspan="3">35V: 0603 <math>\geq 1\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 2.2\mu\text{F}</math>; 1210 <math>\geq 10\mu\text{F}</math></td> </tr> <tr> <td colspan="3">25V: 0201 <math>\geq 0.1\mu\text{F}</math>; 0402 <math>\geq 0.22\mu\text{F}</math>; 0603 <math>\geq 2.2\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 10\mu\text{F}</math>; 1210 <math>\geq 10\mu\text{F}</math></td> </tr> <tr> <td colspan="3">16V: 0201 <math>\geq 0.1\mu\text{F}</math>; 0402 <math>\geq 0.22\mu\text{F}</math>; 0603 <math>\geq 1\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 10\mu\text{F}</math>; 1210 <math>\geq 47\mu\text{F}</math></td> </tr> <tr> <td colspan="3">10V: 0201 <math>\geq 47n\text{F}</math>; 0402 <math>\geq 0.47\mu\text{F}</math>; 0603 <math>\geq 0.47\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; 1206 <math>\geq 4.7\mu\text{F}</math>; 1210 <math>\geq 47\mu\text{F}</math></td> </tr> <tr> <td colspan="3">6.3V ; 4V ; All X6S/X7S items; Size <math>\geq 1812</math></td> </tr> </tbody> </table>	Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$	$\geq 100V$	$\leq 3\%$	$\leq 6\% 1206 \geq 0.47\mu\text{F}$ $\leq 7.5\% 0603 \geq 0.068\mu\text{F}; 0805 \geq 0.1\mu\text{F}; 1206 \geq 1\mu\text{F}; 1210 \geq 2.2\mu\text{F}$ $\leq 20\% 0805 \geq 0.22\mu\text{F}; 1210 \geq 3.3\mu\text{F}$	50V	$\leq 3\%$	$\leq 6\% 0201(50V); 0603 \geq 0.047\mu\text{F}; 0805 \geq 0.18\mu\text{F}; 1206 \geq 0.47\mu\text{F}$ $\leq 10\% 0201 \geq 0.01\mu\text{F}; 1210 \geq 3.3\mu\text{F}$ $\leq 20\% 0402 \geq 0.012\mu\text{F}; 0603 > 0.1\mu\text{F}; 0805 \geq 1\mu\text{F}(0805/X7R > 0.47\mu\text{F});$ $1206 \geq 2.2\mu\text{F}; 1210 \geq 10\mu\text{F};$	$\leq 5\%$	$\leq 20\% 0603 \geq 1\mu\text{F}; 0805 \geq 2.2\mu\text{F}; 1206 \geq 2.2\mu\text{F}; 1210 \geq 10\mu\text{F}$ $\leq 10\% 0201 \geq 0.01\mu\text{F}(0201/X5R = 0.01\mu\text{F}); 0805 \geq 1\mu\text{F}; 1210 \geq 10\mu\text{F}^*$ $\leq 14\% 0603 \geq 0.33\mu\text{F}$	25V	$\leq 5\%$	$\leq 15\% 0201 \geq 0.1\mu\text{F}(0201/X5R > 0.01\mu\text{F}); 0603 \geq 0.47\mu\text{F}; \text{TTseries}$ $0402 \geq 0.10\mu\text{F}(0402/X7R \geq 0.056\mu\text{F}); 0805 \geq 2.2\mu\text{F};$ $1206 \geq 4.7\mu\text{F}; 1210 \geq 22\mu\text{F}(1210/X5R \geq 10\mu\text{F})^*$ $\leq 20\% 0402 \geq 0.47\mu\text{F}$	16V	$\leq 5\%$	$\leq 10\% 0603 \geq 0.15\mu\text{F}; 0805 \geq 0.68\mu\text{F}; 1206 \geq 2.2\mu\text{F}; 1210 \geq 4.7\mu\text{F}$ $\leq 15\% 0201 \geq 0.01\mu\text{F}(0201/X7R \geq 0.022\mu\text{F}); 0402 \geq 0.033\mu\text{F};$ $0603 > 0.47\mu\text{F}; 0805 \geq 2.2\mu\text{F}; 1206 \geq 4.7\mu\text{F}; 1210 \geq 22\mu\text{F}$	$\leq 7.5\%$	$\leq 15\% 0201 \geq 0.012\mu\text{F}; 0402 \geq 0.22\mu\text{F};$ $0603 \geq 0.33\mu\text{F}; 0805 \geq 2.2\mu\text{F}; 1206 \geq 2.2\mu\text{F}; 1210 \geq 22\mu\text{F}$ $\leq 20\% 0201 \geq 0.1\mu\text{F}; 0402 \geq 1\mu\text{F}; 0603/X5R \geq 10\mu\text{F}; 01R5/X5R$	10V	$\leq 15\%$	$0201 \geq 0.1\mu\text{F}; 0402 \geq 1\mu\text{F}(0402/X6S \geq 0.47\mu\text{F});$ $0603 \geq 10\mu\text{F}; 0805 \geq 4.7\mu\text{F}; 1206 \geq 47\mu\text{F}; 1210 \geq 100\mu\text{F}$	6.3V	$\leq 30\%$	---	4V	$\leq 20\%$	---	Y5V:				Rated vol.	$\leq 7.5\%$	$\leq 10\% 0603 \geq 0.1\mu\text{F}; 0805 \geq 0.47\mu\text{F}; 1206 \geq 4.7\mu\text{F}$ $\leq 20\% 1210 \geq 6.8\mu\text{F}$	35V	$\leq 10\%$	---	$\leq 7.5\%$	$\leq 10\% 0402 \geq 0.047\mu\text{F}; 0603 \geq 0.1\mu\text{F};$ $0805 \geq 0.33\mu\text{F}; 1206 \geq 1\mu\text{F}; 1210 \geq 4.7\mu\text{F}$	$\leq 15\%$	$0402 \geq 0.068\mu\text{F}; 0603 \geq 0.47\mu\text{F};$ $1206 \geq 4.7\mu\text{F}; 1210 \geq 22\mu\text{F}$	25V	$\leq 10\%$	$\leq 12.5\% 0402 \geq 0.068\mu\text{F}; 0603 \geq 0.68\mu\text{F}$	$\leq 20\%$	$0402 \geq 0.22\mu\text{F}$	$\leq 12.5\%$	$0603 \geq 2.2\mu\text{F}; 0805 \geq 3.3\mu\text{F};$ $1206 \geq 10\mu\text{F}; 1210 \geq 22\mu\text{F}; 1812 \geq 47\mu\text{F}$	16V	$\leq 20\%$	$0402 \geq 0.22\mu\text{F}$	16V ( $C < 1\mu\text{F}$ )	$\leq 30\%$	$0402 \geq 0.47\mu\text{F}$	16V ( $C \geq 1.0\mu\text{F}$ )	$\leq 20\%$	$0603 \geq 2.2\mu\text{F}; 0805 \geq 3.3\mu\text{F};$ $1206 \geq 10\mu\text{F}; 1210 \geq 22\mu\text{F}; 1812 \geq 47\mu\text{F}$	10V	$\leq 20\%$	$0402 \geq 0.47\mu\text{F}$	6.3V	$\leq 30\%$	---	*I.R.: $\geq 10V$ , $500M\Omega$ or $25 \Omega\text{-F}$ whichever is smaller. Class II (X7R, X5R, X6S, X7S, Y5V)				Rated voltage			Insulation Resistance	100V: All X7R; 1210 $\geq 3.3\mu\text{F}$			500MΩ or $RxC \geq 5 \Omega\text{-F}$ whichever is smaller.	50V: 0402 $\geq 0.01\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 1\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 4.7\mu\text{F}$			35V: 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$			25V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 2.2\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 10\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$			16V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 10\mu\text{F}$ ; 1210 $\geq 47\mu\text{F}$			10V: 0201 $\geq 47n\text{F}$ ; 0402 $\geq 0.47\mu\text{F}$ ; 0603 $\geq 0.47\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 47\mu\text{F}$			6.3V ; 4V ; All X6S/X7S items; Size $\geq 1812$		
Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$																																																																																															
$\geq 100V$	$\leq 3\%$	$\leq 6\% 1206 \geq 0.47\mu\text{F}$ $\leq 7.5\% 0603 \geq 0.068\mu\text{F}; 0805 \geq 0.1\mu\text{F}; 1206 \geq 1\mu\text{F}; 1210 \geq 2.2\mu\text{F}$ $\leq 20\% 0805 \geq 0.22\mu\text{F}; 1210 \geq 3.3\mu\text{F}$																																																																																															
	50V	$\leq 3\%$	$\leq 6\% 0201(50V); 0603 \geq 0.047\mu\text{F}; 0805 \geq 0.18\mu\text{F}; 1206 \geq 0.47\mu\text{F}$ $\leq 10\% 0201 \geq 0.01\mu\text{F}; 1210 \geq 3.3\mu\text{F}$ $\leq 20\% 0402 \geq 0.012\mu\text{F}; 0603 > 0.1\mu\text{F}; 0805 \geq 1\mu\text{F}(0805/X7R > 0.47\mu\text{F});$ $1206 \geq 2.2\mu\text{F}; 1210 \geq 10\mu\text{F};$																																																																																														
		$\leq 5\%$	$\leq 20\% 0603 \geq 1\mu\text{F}; 0805 \geq 2.2\mu\text{F}; 1206 \geq 2.2\mu\text{F}; 1210 \geq 10\mu\text{F}$ $\leq 10\% 0201 \geq 0.01\mu\text{F}(0201/X5R = 0.01\mu\text{F}); 0805 \geq 1\mu\text{F}; 1210 \geq 10\mu\text{F}^*$ $\leq 14\% 0603 \geq 0.33\mu\text{F}$																																																																																														
25V		$\leq 5\%$	$\leq 15\% 0201 \geq 0.1\mu\text{F}(0201/X5R > 0.01\mu\text{F}); 0603 \geq 0.47\mu\text{F}; \text{TTseries}$ $0402 \geq 0.10\mu\text{F}(0402/X7R \geq 0.056\mu\text{F}); 0805 \geq 2.2\mu\text{F};$ $1206 \geq 4.7\mu\text{F}; 1210 \geq 22\mu\text{F}(1210/X5R \geq 10\mu\text{F})^*$ $\leq 20\% 0402 \geq 0.47\mu\text{F}$																																																																																														
	16V	$\leq 5\%$	$\leq 10\% 0603 \geq 0.15\mu\text{F}; 0805 \geq 0.68\mu\text{F}; 1206 \geq 2.2\mu\text{F}; 1210 \geq 4.7\mu\text{F}$ $\leq 15\% 0201 \geq 0.01\mu\text{F}(0201/X7R \geq 0.022\mu\text{F}); 0402 \geq 0.033\mu\text{F};$ $0603 > 0.47\mu\text{F}; 0805 \geq 2.2\mu\text{F}; 1206 \geq 4.7\mu\text{F}; 1210 \geq 22\mu\text{F}$																																																																																														
		$\leq 7.5\%$	$\leq 15\% 0201 \geq 0.012\mu\text{F}; 0402 \geq 0.22\mu\text{F};$ $0603 \geq 0.33\mu\text{F}; 0805 \geq 2.2\mu\text{F}; 1206 \geq 2.2\mu\text{F}; 1210 \geq 22\mu\text{F}$ $\leq 20\% 0201 \geq 0.1\mu\text{F}; 0402 \geq 1\mu\text{F}; 0603/X5R \geq 10\mu\text{F}; 01R5/X5R$																																																																																														
10V		$\leq 15\%$	$0201 \geq 0.1\mu\text{F}; 0402 \geq 1\mu\text{F}(0402/X6S \geq 0.47\mu\text{F});$ $0603 \geq 10\mu\text{F}; 0805 \geq 4.7\mu\text{F}; 1206 \geq 47\mu\text{F}; 1210 \geq 100\mu\text{F}$																																																																																														
6.3V	$\leq 30\%$	---																																																																																															
4V	$\leq 20\%$	---																																																																																															
Y5V:																																																																																																	
Rated vol.	$\leq 7.5\%$	$\leq 10\% 0603 \geq 0.1\mu\text{F}; 0805 \geq 0.47\mu\text{F}; 1206 \geq 4.7\mu\text{F}$ $\leq 20\% 1210 \geq 6.8\mu\text{F}$																																																																																															
	35V	$\leq 10\%$	---																																																																																														
		$\leq 7.5\%$	$\leq 10\% 0402 \geq 0.047\mu\text{F}; 0603 \geq 0.1\mu\text{F};$ $0805 \geq 0.33\mu\text{F}; 1206 \geq 1\mu\text{F}; 1210 \geq 4.7\mu\text{F}$																																																																																														
		$\leq 15\%$	$0402 \geq 0.068\mu\text{F}; 0603 \geq 0.47\mu\text{F};$ $1206 \geq 4.7\mu\text{F}; 1210 \geq 22\mu\text{F}$																																																																																														
	25V	$\leq 10\%$	$\leq 12.5\% 0402 \geq 0.068\mu\text{F}; 0603 \geq 0.68\mu\text{F}$																																																																																														
		$\leq 20\%$	$0402 \geq 0.22\mu\text{F}$																																																																																														
		$\leq 12.5\%$	$0603 \geq 2.2\mu\text{F}; 0805 \geq 3.3\mu\text{F};$ $1206 \geq 10\mu\text{F}; 1210 \geq 22\mu\text{F}; 1812 \geq 47\mu\text{F}$																																																																																														
	16V	$\leq 20\%$	$0402 \geq 0.22\mu\text{F}$																																																																																														
	16V ( $C < 1\mu\text{F}$ )	$\leq 30\%$	$0402 \geq 0.47\mu\text{F}$																																																																																														
16V ( $C \geq 1.0\mu\text{F}$ )	$\leq 20\%$	$0603 \geq 2.2\mu\text{F}; 0805 \geq 3.3\mu\text{F};$ $1206 \geq 10\mu\text{F}; 1210 \geq 22\mu\text{F}; 1812 \geq 47\mu\text{F}$																																																																																															
10V	$\leq 20\%$	$0402 \geq 0.47\mu\text{F}$																																																																																															
6.3V	$\leq 30\%$	---																																																																																															
*I.R.: $\geq 10V$ , $500M\Omega$ or $25 \Omega\text{-F}$ whichever is smaller. Class II (X7R, X5R, X6S, X7S, Y5V)																																																																																																	
Rated voltage			Insulation Resistance																																																																																														
100V: All X7R; 1210 $\geq 3.3\mu\text{F}$			500MΩ or $RxC \geq 5 \Omega\text{-F}$ whichever is smaller.																																																																																														
50V: 0402 $\geq 0.01\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 1\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 4.7\mu\text{F}$																																																																																																	
35V: 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 2.2\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$																																																																																																	
25V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 2.2\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 10\mu\text{F}$ ; 1210 $\geq 10\mu\text{F}$																																																																																																	
16V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 10\mu\text{F}$ ; 1210 $\geq 47\mu\text{F}$																																																																																																	
10V: 0201 $\geq 47n\text{F}$ ; 0402 $\geq 0.47\mu\text{F}$ ; 0603 $\geq 0.47\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; 1206 $\geq 4.7\mu\text{F}$ ; 1210 $\geq 47\mu\text{F}$																																																																																																	
6.3V ; 4V ; All X6S/X7S items; Size $\geq 1812$																																																																																																	

\* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors



No	Item	Test Condition			Requirements										
15.	High Temperature Load (Endurance)	Test temp. : NP0, X7R/X7E/X7S: $125 \pm 3^\circ\text{C}$ X6S: $105 \pm 3^\circ\text{C}$ X5R, Y5V: $85 \pm 3^\circ\text{C}$ Test time: 1000+24/-0 hrs. To apply voltage: (1) 100% of rated voltage for below range. (2) 150% of rated voltage for below range.			* No remarkable damage. Cap change: NP0: $\pm 3.0\%$ or $\pm 0.3\mu\text{F}$ whichever is larger X7R, X5R, X6S, X7S: $\geq 10\text{V}^{**}$ , within $\pm 12.5\%$ ; $\leq 6.3\text{V}$ within $\pm 25\%$ ; $^{**} 10\text{V}: 0603 \geq 4.7\mu\text{F}; 0402 \geq 1\mu\text{F}; 0201 \geq 0.1\mu\text{F}$ , within $\pm 25\%$ Y5V: $\geq 10\text{V}$ , within $\pm 30\%$ ; $\leq 6.3\text{V}$ , within $+30/-40\%$ Q/D.F. value: NP0: More than $30\text{pF}$ , $Q \geq 350$ $10\text{pF} \leq C < 30\text{pF}$ , $Q \geq 275 \pm 2.5\%$ Less than $10\text{pF}$ , $Q \geq 200 + 10\text{C}$ X7R, X5R, X6S, X7S:										
		Size	Dielectric	Rated voltage	Capacitance										
		0201	X5R/X7R/ X6S/X7S	$\leq 10\text{V}$	$C \geq 0.1\mu\text{F}$										
				$\geq 16\text{V}$	$C > 0.1\mu\text{F}$										
		0402	X5R	$\leq 16\text{V}$	$C > 1.0\mu\text{F}$										
				$25\text{V}, 50\text{V}$	$C \geq 1.0\mu\text{F}$										
			X6S	$6.3\text{V}, 10\text{V}$	$C > 1.0\mu\text{F}$										
				$16\text{V}, 25\text{V}$	$C \geq 1.0\mu\text{F}$										
		0603	X7R/X7S/Y5V	$6.3\text{V}, 10\text{V}$	$C \geq 1.0\mu\text{F}$	Rated vol.	D.F. $\leq$								
			X5R/X7R/ X6S/X7S	$4\text{V}$	$C \geq 22\mu\text{F}$	$\geq 100\text{V}$	$\leq 6\%$								
				$6.3\text{V}, 10\text{V}$	$C \geq 4.7\mu\text{F}$		$\leq 7.5\%$								
			X5R/X6S/X7S	$25\text{V}$	$C \geq 1.0\mu\text{F}$		$\leq 20\%$								
		0805	X7R	$35\text{V}$	$C \geq 1.0\mu\text{F}$										
			X5R/X7R/ X6S/X7S	$4\text{V}$	$C \geq 47\mu\text{F}$		$\leq 6\%$								
				$6.3\text{V}$	$C \geq 22\mu\text{F}$		$\leq 10\%$								
			X6S	$10\text{V}, 50\text{V}$	$C \geq 10\mu\text{F}$		$\leq 20\%$								
				$16\text{V}$	$C > 10\mu\text{F}$		$\leq 14\%$								
			X7R/X7S	$25\text{V}$	$C \geq 10\mu\text{F}$		$\leq 10\%$								
			X5R	$16\text{V}, 25\text{V}$	$C \geq 22\mu\text{F}$		$\leq 15\%$								
			X5R/X7R/X6S	$\leq 6.3\text{V}$	$C \geq 47\mu\text{F}$		$\leq 20\%$								
		1206	X5R/X7R/X6S	$16\text{V}$	$C \geq 47\mu\text{F}$		$\leq 15\%$								
			X5R/X7R/X6S	$100\text{V}$	$C \geq 3.3\mu\text{F}$		$\leq 20\%$								
			X7R	$100\text{V}$	$C \geq 3.3\mu\text{F}$		$\leq 20\%$								
			TT15	$6.3\text{V}$	$C > 1.0\mu\text{F}$		$\leq 20\%$								
		TT21	X5R/X7R/X6S	$\leq 10\text{V}$	$C \geq 10\mu\text{F}$		$\leq 10\%$								
							$\leq 15\%$								
		**1WV items must follow de-rating conditions.													
		(2) 150% of rated voltage for below range.													
		Size	Dielectric	Rated voltage	Capacitance										
		0201	X5R/X6S	$16\text{V}, 25\text{V}$	$C=0.1\mu\text{F}$										
			X7R	$16\text{V}$	$C \geq 0.022\mu\text{F}$										
		0402	X7R/X5R/ X6S	$50\text{V}$	$C > 0.01\mu\text{F}$	Rated vol.	D.F. $\leq$								
				$10\text{--}25\text{V}$	$C \geq 0.22\mu\text{F}$	$\geq 10\text{V}$	$\leq 7.5\%$								
			X5R	$16\text{V}$	$C \geq 0.47\mu\text{F}$	$\geq 25\text{V}$	$\leq 7.5\%$								
			X7S	$50\text{V}\text{--}100\text{V}$	$C > 0.22\mu\text{F}$	$\geq 35\text{V}$	$\leq 10\%$								
		0603	X7R	$50\text{V}$	$C > 0.1\mu\text{F}$										
				$25\text{V}$	$C = 1.0\mu\text{F}$										
			X5R	$50\text{V}$	$C \geq 1.0\mu\text{F}$										
			X5R/X7R/ X6S/X7S	$10\text{V}, 16\text{V}$	$C \geq 1.0\mu\text{F}$										
		0805	Y5V	$16\text{V}$	$C \geq 2.2\mu\text{F}$										
				$100\text{V}$	$C \geq 0.47\mu\text{F}$										
				$50\text{V}$	$C \geq 0.68\mu\text{F}$										
				$35\text{V}$	$C \geq 2.2\mu\text{F}$										
		1206		$10\text{--}25\text{V}$	$C \geq 4.7\mu\text{F}$										
				$16\text{V}$	$C \geq 4.7\mu\text{F}$										
			X7R	$100\text{V}$	$C \geq 1.0\mu\text{F}$										
				$50\text{V}$	$C \geq 2.2\mu\text{F}$										
		1210	X5R/X6S/ X7S	$100\text{V}$	$C > 1.0\mu\text{F}$										
				$50\text{V}$	$C = 4.7\mu\text{F}$										
			X5R/X7R/ X6S/X7S	$50\text{V}\text{--}100\text{V}$	$C \geq 2.2\mu\text{F}$										
		1825 2220 2225	X7R	$100\text{V}\text{--}250\text{V}$	$C \geq 1.0\mu\text{F}$										
		(3) $\leq 6.3\text{V}$ or $C \geq 10\mu\text{F}$ : 150% of rated voltage.													
		(4) $10\text{V} \leq U_r < 250\text{V}$ : 200% of rated voltage.													
		(5) 500V: 150% of rated voltage.													
		(6) $U \geq 630\text{V}$ : 120% of rated voltage													
		* Before initial measurement (Class II only): To apply de-aging at $150^\circ\text{C}$ for 1 hr then set for $24 \pm 2$ hrs at room temp.													
		* Cap. / DF(Q) / I.R. Measurement to be made after de-aging at $150^\circ\text{C}$ for 1 hr then set for $24 \pm 2$ hrs at room temp.													
		** De-rating conditions:													
															
		* I.R.: $\geq 10\Omega$ or $R_x C \geq 10\Omega\text{-F}$ whichever is smaller. Class II (X7R, X5R, X6S, X7S, Y5V)													
		<table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R; <math>1210 \geq 3.3\mu\text{F}</math></td> <td rowspan="6">10Ω-F whichever is smaller.</td> </tr> <tr> <td>50V: 0402 <math>\geq 0.01\mu\text{F}</math>; 0603 <math>\geq 1\mu\text{F}</math>; 0805 <math>\geq 1\mu\text{F}</math>; <math>1206 \geq 4.7\mu\text{F}</math>; <math>1210 \geq 4.7\mu\text{F}</math></td> </tr> <tr> <td>35V: 0603 <math>\geq 1\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; <math>1206 \geq 2.2\mu\text{F}</math>; <math>1210 \geq 10\mu\text{F}</math></td> </tr> <tr> <td>25V: 0201 <math>\geq 0.1\mu\text{F}</math>; 0402 <math>\geq 0.22\mu\text{F}</math>; 0603 <math>\geq 2.2\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; <math>1206 \geq 10\mu\text{F}</math>; <math>1210 \geq 10\mu\text{F}</math></td> </tr> <tr> <td>16V: 0201 <math>\geq 0.1\mu\text{F}</math>; 0402 <math>\geq 0.22\mu\text{F}</math>; 0603 <math>\geq 1\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; <math>1206 \geq 10\mu\text{F}</math>; <math>1210 \geq 47\mu\text{F}</math></td> </tr> <tr> <td>10V: 0201 <math>\geq 47\mu\text{F}</math>; 0402 <math>\geq 0.47\mu\text{F}</math>; 0603 <math>\geq 0.47\mu\text{F}</math>; 0805 <math>\geq 2.2\mu\text{F}</math>; <math>1206 \geq 4.7\mu\text{F}</math>; <math>1210 \geq 47\mu\text{F}</math></td> </tr> <tr> <td>6.3V : 4V ; All X6S/X7S items; Size <math>\geq 1812</math></td> <td></td> </tr> </tbody> </table>			Rated voltage	Insulation Resistance	100V: All X7R; $1210 \geq 3.3\mu\text{F}$	10Ω-F whichever is smaller.	50V: 0402 $\geq 0.01\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 1\mu\text{F}$ ; $1206 \geq 4.7\mu\text{F}$ ; $1210 \geq 4.7\mu\text{F}$	35V: 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; $1206 \geq 2.2\mu\text{F}$ ; $1210 \geq 10\mu\text{F}$	25V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 2.2\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; $1206 \geq 10\mu\text{F}$ ; $1210 \geq 10\mu\text{F}$	16V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; $1206 \geq 10\mu\text{F}$ ; $1210 \geq 47\mu\text{F}$	10V: 0201 $\geq 47\mu\text{F}$ ; 0402 $\geq 0.47\mu\text{F}$ ; 0603 $\geq 0.47\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; $1206 \geq 4.7\mu\text{F}$ ; $1210 \geq 47\mu\text{F}$	6.3V : 4V ; All X6S/X7S items; Size $\geq 1812$	
Rated voltage	Insulation Resistance														
100V: All X7R; $1210 \geq 3.3\mu\text{F}$	10Ω-F whichever is smaller.														
50V: 0402 $\geq 0.01\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 1\mu\text{F}$ ; $1206 \geq 4.7\mu\text{F}$ ; $1210 \geq 4.7\mu\text{F}$															
35V: 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; $1206 \geq 2.2\mu\text{F}$ ; $1210 \geq 10\mu\text{F}$															
25V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 2.2\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; $1206 \geq 10\mu\text{F}$ ; $1210 \geq 10\mu\text{F}$															
16V: 0201 $\geq 0.1\mu\text{F}$ ; 0402 $\geq 0.22\mu\text{F}$ ; 0603 $\geq 1\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; $1206 \geq 10\mu\text{F}$ ; $1210 \geq 47\mu\text{F}$															
10V: 0201 $\geq 47\mu\text{F}$ ; 0402 $\geq 0.47\mu\text{F}$ ; 0603 $\geq 0.47\mu\text{F}$ ; 0805 $\geq 2.2\mu\text{F}$ ; $1206 \geq 4.7\mu\text{F}$ ; $1210 \geq 47\mu\text{F}$															
6.3V : 4V ; All X6S/X7S items; Size $\geq 1812$															

\* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.


## Multilayer Ceramic Capacitors

### APPENDIXES

#### □ Tape & reel dimensions

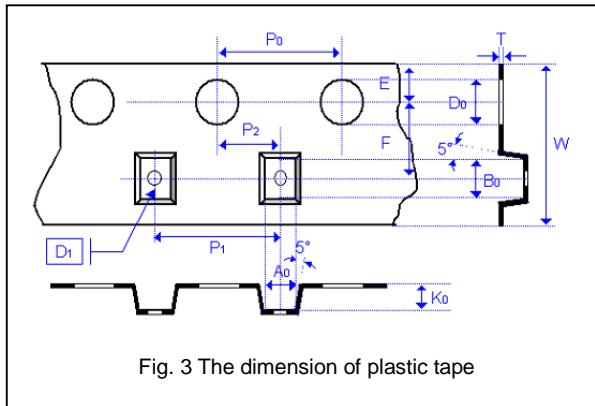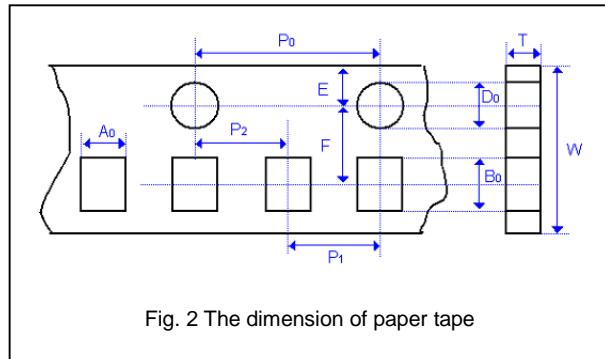


Size	0201	0402	0603	0805				1206				1210				1808			1812		
Thickness	L	N,E	S,H,X	A,H	B,T	D,I	B,T	C,J,D	G,P	T	C,D	G,K	M	D,F	G,K	D,F	G,K	M,U			
<b>A<sub>0</sub></b>	0.40 +/-0.10	0.70 +/-0.20	1.05 +/-0.30	1.50 +/-0.20	1.50 +/-0.20	<1.80	1.90 +/-0.50	<2.00	<2.30	<3.05	<3.05	<3.05	<3.20	<2.50	<2.50	<3.90	<3.90	<3.90			
<b>B<sub>0</sub></b>	0.70 +/-0.10	1.20 +/-0.20	1.80 +/-0.30	2.30 +/-0.20	2.30 +/-0.20	<2.70	3.50 +/-0.50	<3.70	<4.00	<3.80	<3.80	<3.80	<4.00	<5.30	<5.30	<5.30	<5.30	<5.30			
<b>T</b>	≤0.55	≤0.80	≤1.20	≤1.15	≤1.20	+/-0.1	≤1.20	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1			
<b>K<sub>0</sub></b>	-	-	-	-	-	<2.00	-	<2.00	<2.50	<1.50	<2.00	<2.50	<3.20	<2.00	<2.50	<2.00	<2.50	<3.50			
<b>W</b>	8.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30															
<b>P<sub>0</sub></b>	4.00 +/-0.10																				
<b>10xP<sub>0</sub></b>	40.00 +/-0.10	40.00 +/-0.10	40.00 +/-0.20																		
<b>P<sub>1</sub></b>	2.00 +/-0.05	2.00 +/-0.05	4.00 +/-0.10																		
<b>P<sub>2</sub></b>	2.00 +/-0.05	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10																
<b>D<sub>0</sub></b>	1.50 +0.1/-0																				
<b>D<sub>1</sub></b>	-	-	-	-	-	1.00 +/-0.10	-	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0				
<b>E</b>	1.75 +/-0.10																				
<b>F</b>	3.50 +/-0.05	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10															

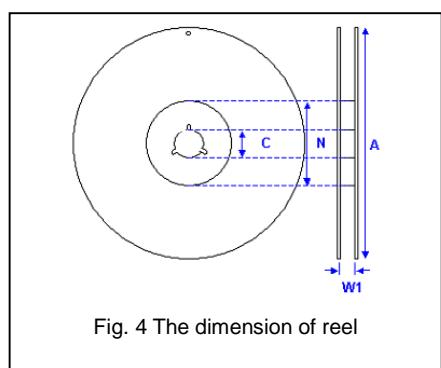

Size	0201, 0402, 0603, 0805, 1206, 1210			1812
Reel size	7"	10"	13"	7"
<b>C</b>	13.0±0.5	13.0±0.5	13.0±0.5	13.0±0.5
<b>W<sub>1</sub></b>	10.0±1.5	10.0±1.5	10.0±1.5	12.4±2.0/-0
<b>A</b>	178.0±2.0	250.0±2.0	330.0±2.0	178.0±2.0
<b>N</b>	60.0±1.0/-0	50 min	50 min	60.0±1.0/-0

## Multilayer Ceramic Capacitors

### Example of customer label

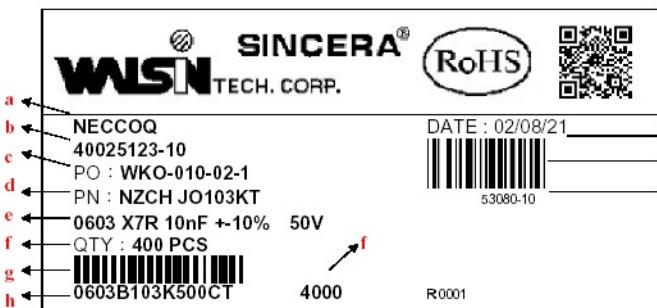

- a. Customer name
- b. WTC order series and item number
- c. Customer P/O
- d. Customer P/N
- e. Description of product
- f. Quantity
- g. Bar code including quantity & WTC P/N or customer
- h. WTC P/N
- i. Shipping date
- j. Order bar code including series and item numbers
- k. Serial number of label

\*Customized label is available upon request

### Constructions

No.	Name	NPO	X7R, X5R, X6S, X7S, Y5V
①	Ceramic material	CaZrO <sub>3</sub> based	BaTiO <sub>3</sub> based
②	Inner electrode		Ni
③	Termination	Inner layer	Cu
④		Middle layer	Ni
⑤		Outer layer	Sn

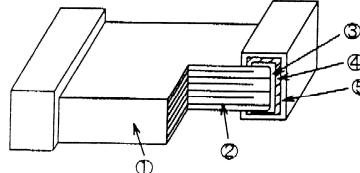


Fig. 5 The construction of MLCC

### Storage and handling conditions

- To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions; MSL Level 1.
- The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

#### Cautions:

- The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

## Multilayer Ceramic Capacitors

### ■ Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N<sub>2</sub> within oven are recommended.

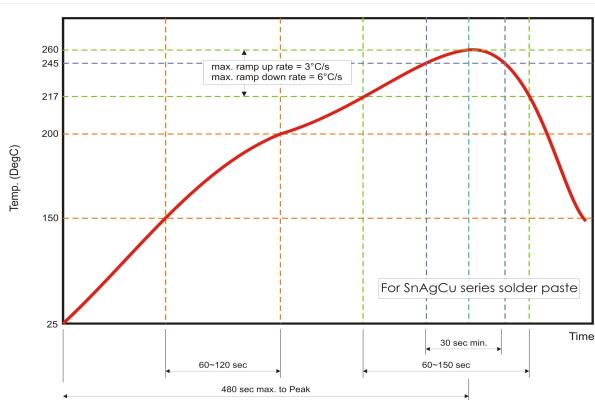


Fig. 6 Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

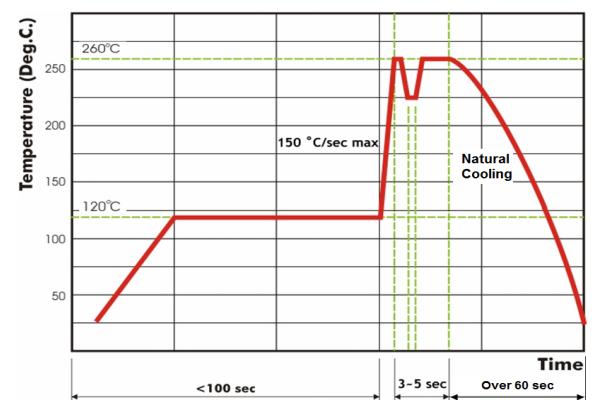


Fig. 7 Recommended wave soldering profile for SMT process with SnAgCu series solder.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Kamaya:

[0402B105K6R3CT](#) [0603N682J500CT](#) [1206B225K500CT](#) [1206B226K6R3CT](#) [1206N104J500CT](#) [1210B106K500CT](#)  
[0201N1R8A250CT](#) [0603N392J500CT](#) [0603X225K500CT](#) [2220B106K101CT](#) [0402N3R0B101CT](#) [0603B333K101CT](#)  
[1210X476M250CT](#) [0402X334M160CT](#) [0402X334M160CG](#)

## Walsin:

[0402N1R2C500LT](#) [0402N1R5C500LT](#) [0402N3R3C500LT](#) [0402N4R7C500LT](#) [0402N5R6C500LT](#)  
[0603N1R0C500LT](#) [0402B471K500CT](#) [0402B102K500CT](#) [0402B152K500CT](#) [0402B222K500CT](#) [0402B392K500CT](#)  
[0402B103K500CT](#) [0402B103K250CT](#) [0402B103K160CT](#) [0402B123K160CT](#) [0603B103K500CT](#) [0402X104K160CT](#)  
[0402N101J500CT](#) [0402N150J500CT](#) [0402N330J500CT](#) [0402N2R2C500LT](#) [0402X106M6R3CT](#) [0402N5R6C500CT](#)  
[0603N1R0C500CT](#) [0402N100J500CT](#) [0603N150F500CT](#) [0402N220G500CT](#) [0603N120J500CT](#) [0402N2R2C500CT](#)  
[0402X105K100CT](#) [1206B104K500CT](#) [1206B105K500CT](#) [1206B103K500CT](#) [0805B102K500CT](#) [1206B475K250CT](#)  
[0603N180J500CT](#) [0603B682K500CT](#) [0603B393K500CT](#) [0603B104K160CT](#) [0402B333K100CT](#) [0402N0R5B500CT](#)  
[0402N120F500CT](#) [0402B473K500CT](#) [0201X223K6R3CT](#) [0402N271J500CT](#) [0603B202K500CT](#) [0603N511J500CT](#)  
[0603N680J500CT](#) [0201N180J500CT](#) [0603B104J250CT](#) [0603B333K160CT](#) [0805B333K500CT](#) [0805B333J500CT](#)  
[1206B223K500CT](#) [0201B101K250CT](#) [0603N390J500CT](#) [0603N5R0C500CT](#) [0603N681J500CT](#) [0402B681K500CT](#)  
[0402B104J160CT](#) [0603B472K160CT](#) [1206B222K500CT](#) [1210B104K500CT](#) [0201B222K160CT](#) [0402N100J250CT](#)  
[0603N121J500CT](#) [0603N180J101CT](#) [0603N220J500CT](#) [0402B561K500CT](#) [0603B152K500CT](#) [0603B273K500CT](#)  
[0603B183J500CT](#) [0603B183K500CT](#) [0603B223K500CT](#) [0603B473J500CT](#) [0402B104K100CT](#) [0402N2R4C500CT](#)  
[0402N3R3C500CT](#) [0603N751J500CT](#) [0805N222J500CT](#) [0805N682J500CT](#) [0402B391K500CT](#) [0402B822K250CT](#)  
[0603B392K500CT](#) [1206B472K500CT](#) [0201B472K100CT](#) [0402N3R0B500CT](#) [0603N180F500CT](#) [0603N330F500CT](#)  
[0603N560F500CT](#) [0402B472J500CT](#) [0402B562K250CT](#) [0603B681K101CT](#) [0603B561K500CT](#) [1206B224K101CT](#)  
[1206B102K500CT](#) [0603N220J101CT](#) [0603N222J500CT](#) [0603N270J500CT](#) [0603N300J500CT](#)